


Components for Power Conversion **U-Series**

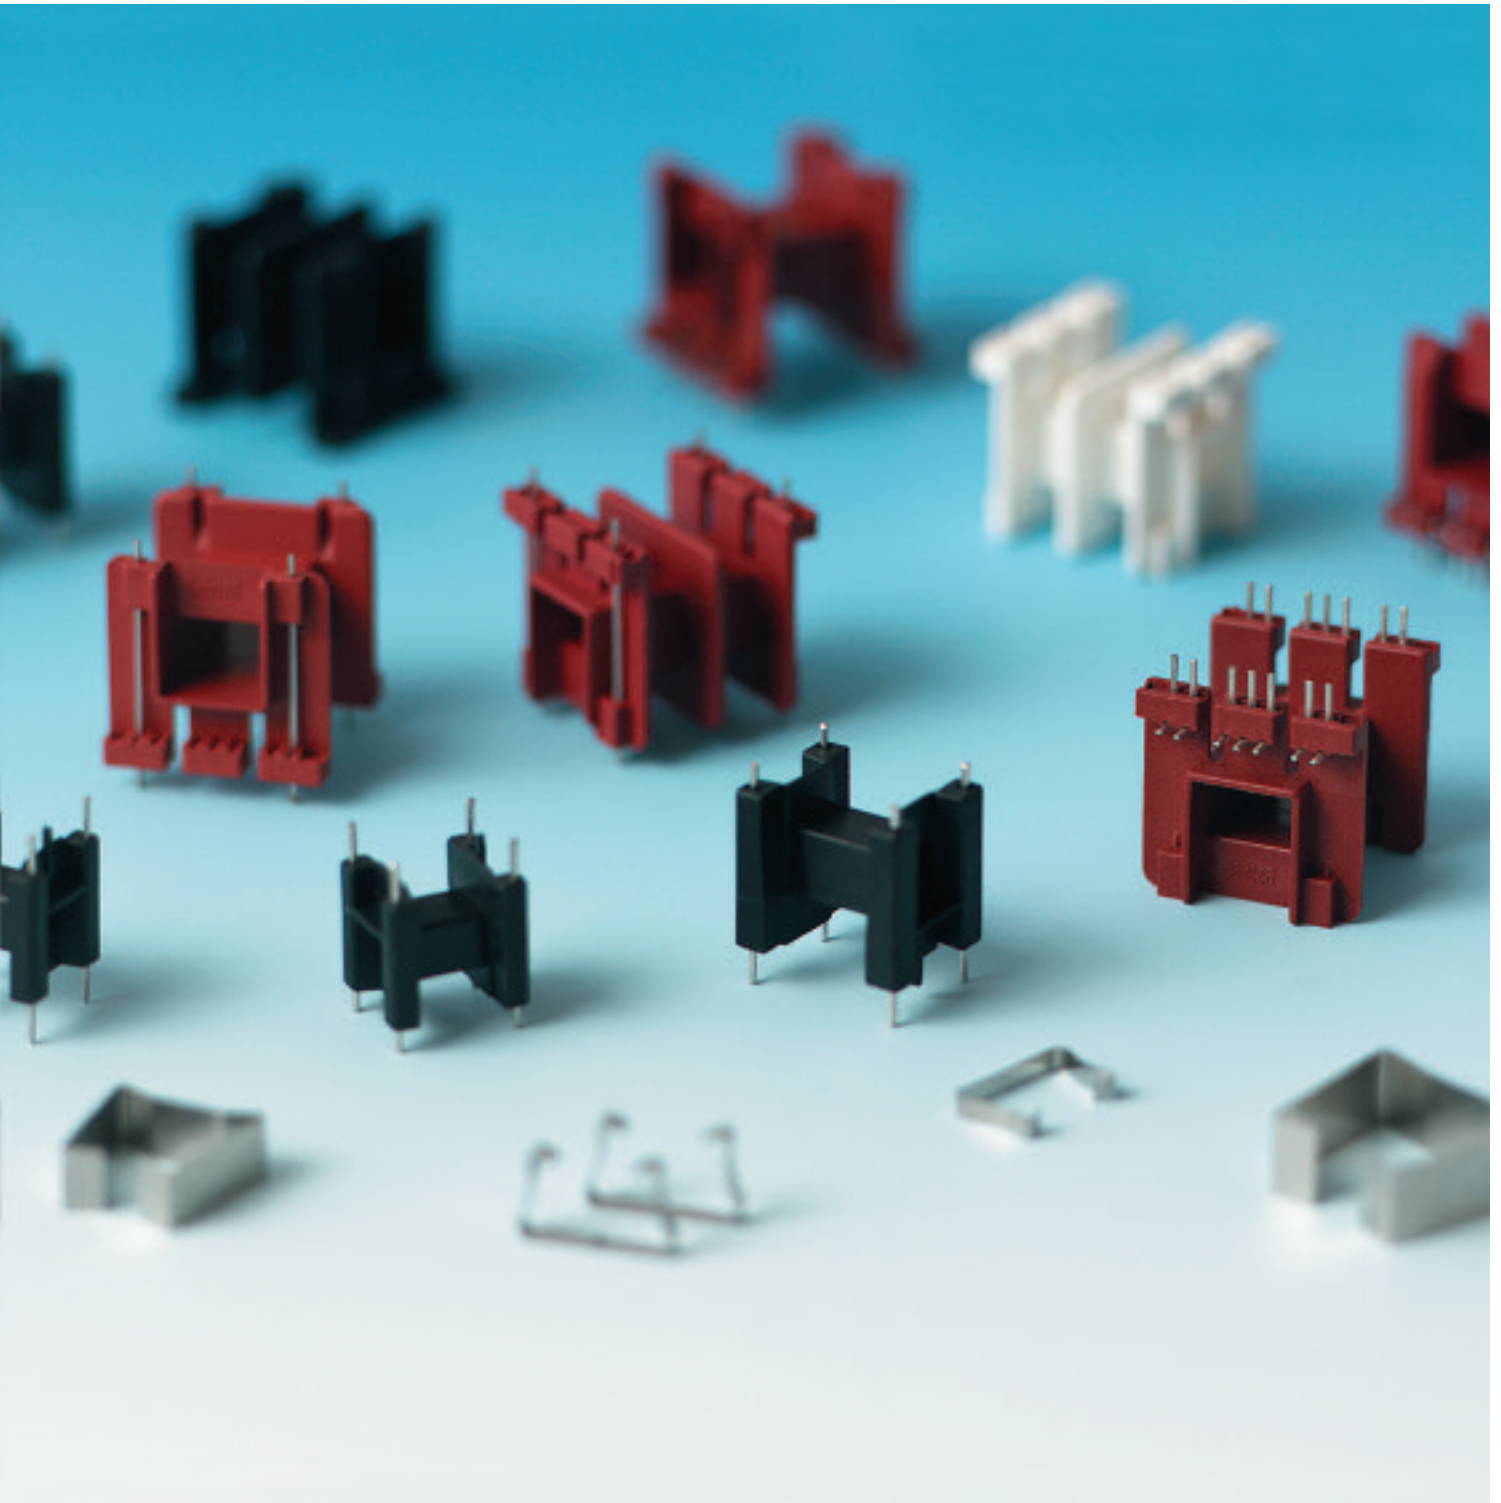

This catalogue contains information on all our products of the U-Series

Transducers with U-ferrites are used in power or pulse applications, high voltage transducers and TV's.

We supply coilformers made in high quality plastics, matching your production requirements.

Our extensive range of modular tooling allows almost unlimited constructional changes to meet customers specification, often by simple changes of tool inserts. In addition the modular tooling system allows extremely short tooling times and can be very cost-effective.


All dimensions in mm.
The permissible deviations according to DIN 16901 apply as tolerances.

Should you need further assistance, be it technical or to assist when planning your order, we look forward to hearing from you.


Fully pinned coilformers are – in small quantities – usually available from stock. We can also quote for coilformers with pins fitted to your requirements. All lead-times are relatively short.

Solder-pins used for U class coilformers

The solder-pins matched to the coilformers are listed below. The material used is tin bronze, tinned. Further standard types are listed in our catalogue "Stamped and Pressed Components for Electronic Applications". (Special materials and designs on request, dimensions in mm).




Solder-pin m819/ua (70187-212)




Solder-pin m125/ua (70176-212)




Solder-pin m129/ua (70177-212)



Solder-pin m82806/ua (70180-212)



Solder-pin h813/ua (73499-212)



Solder-pin z808/ua (73294-212)

Thermoplastic Materials

The following survey contains supplementary information on the different thermoplastic-qualities. The material quality orientates to the conventional use of the components. For technical reasons alternative materials cannot be used for all articles. Consult our qualified specialists regarding your individual material requests – we will be pleased to check whether your material requirements can be realized. Further information on the materials can also be obtained from our homepage (e.g. to call up the UL cards).


NORWE Mat.-Code	NORWE Mat.-Description	Chemical Symbol	Tradename Manufacturer	UL-File-No.	Flammability Rating acc. UL
017	x2g5	PA66 Polyamide 66	Ultramid A3X2G5 BASF AG	E 41871 (M)	V-0 (0.81)
024	p6g	PA66 Polyamide 66	Durethan AKV30H black Bayer AG	–	HB (0.75)

Explanations on the above survey of materials:

- NORWE Mat.-Code designates the number NORWE fixed for the material
- NORWE Mat.-Description names the NORWE-abbreviation for the material
- Chemical Symbol classifies the chemical product group of the material
- Tradename designates the product name or trade name fixed by the manufacturer
- Manufacturer name of manufacturer
- UL-File-No. material quality tested and certified with respect to safety and flammability. The manufacturers of certified and approved products receive a so-called recognition card (yellow card) in which the product qualities are listed in detail. You find all relevant yellow cards – also called UL cards – for different material qualities on our homepage or you can obtain them from us.
- Flammability Rating acc. UL determines the flammability of thermoplastic materials based on burning tests in accordance with UL 94 considering the wall thickness of the material.

U-Ferrite Cores

The tables below show the dimensions of the ferrite cores for the coilformers shown in this catalogue. The data can be used as an orientation in the design of application specific converters.

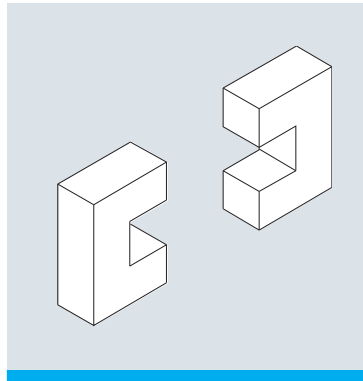


Specific details on the ferrite cores and materials should be available from the catalogues of the ferrite manufacturers.

Dimensions in mm.

Magnetic Characteristics per set	I/A mm ⁻¹	l _e mm	A _e mm ²	A _{min} mm ²	V _e mm ³
U 10/11/6	4,75	38,4	8,4	8,0	323
U 15/8/3	1,50	48,0	32,3	32,0	1540
U 20/16/7	1,24	68,0	56,0	55,0	3740
U 25/20/13	0,82	86,0	105,0	100,0	9030

- I/A – magnetic core factor
- l_e – effective length
- A_e – effective area
- A_{min} – minimum area
- V_e – effective volume
- O – air gap

Type	A	B	C	D	E
U 10/8/3	10.1 ± 0.1	8.2 - 0.2	4.15 ± 0.1	2.9 ± 0.1	5.0 + 0.3
U 15/11/6	15.2 ± 0.7	11.2 ± 0.5	5.20 ± 0.3	6.7 - 0.5	5.9 + 0.5
U 20/16/7	20.8 ± 0.6	15.9 - 0.6	6.30 ± 0.3	7.7 - 0.6	8.0 + 0.6
U 25/20/13	24.8 ± 0.7	20.0 - 0.2	8.20 ± 0.3	13.0 - 0.5	11.0 + 0.5

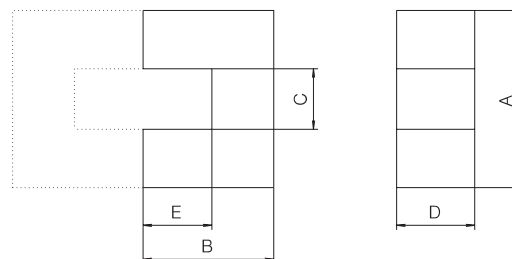

We are at your service – worldwide.

Up-to-date product database

- enlarged, sophisticated search function
- comprehensive product survey
- PDF-files as downloads
- material database with UL-cards

Up-to-date contacts

- contacts all over the world

Up-to-date information

- data and facts of the company
- presence on trade fairs all over the world
- product innovations

Individual special designs

- problem solutions orientated to industries' demands

www.norwe.de

www.norwe.com

www.norwe.eu

www.coilformers.info

www.carretes.eu

www.carreteis.info

www.carcasses.info

www.spulenkoerper.info

www.karkasi-katushek.info

www.corpi-bobina.info

© 07/2011 by NORWE GmbH

Warranties:
refer to Terms and Conditions of Sale



Valid version of
data sheet online

Contact to NORWE

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com