


## EE 8 – EE 32 Horizontal


The coilformers are made in gfr Polyamide PA66 of type x2g5 (RTI long-range temperature +120° C) and in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature +155° C). Pin material is tin bronze, tinned and tag material is brass, tinned. Maximum solder temperature 350° C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

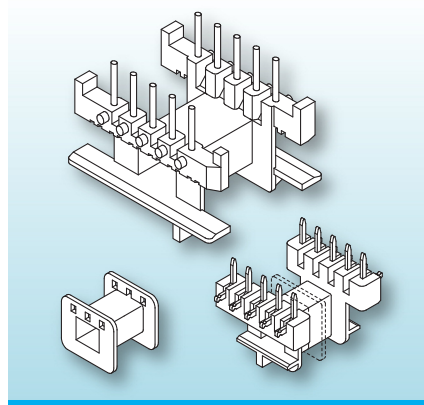


This group of horizontal coilformers is sorted by ferrite core / lamination size and each by pinning with straight pins, side-wrapping pins, solder-tags and conventional coilformers.

Most designs feature terminal strips with “noses” which provide tension-relief of the winding wires and “stand-offs” which allow clean soldering of the coilformer onto the pcb to minimize cold-solder joints. Some coilformers also feature extended flanges to prevent clips sliding off.

Type	Order-Code	Accessories
Coilformer: EE 20/1k/c7-6/2.5-g(h),bh/x2g5	10045-017	Spring-Clip SB-EF/E 20
Coilformer: EE 20/2k/7-6/2.5-g(h),bh/x2g5	10046-017	
Solder-pin: h608/ua	73464-212	
Solder-pin: h610/ua	73466-212	

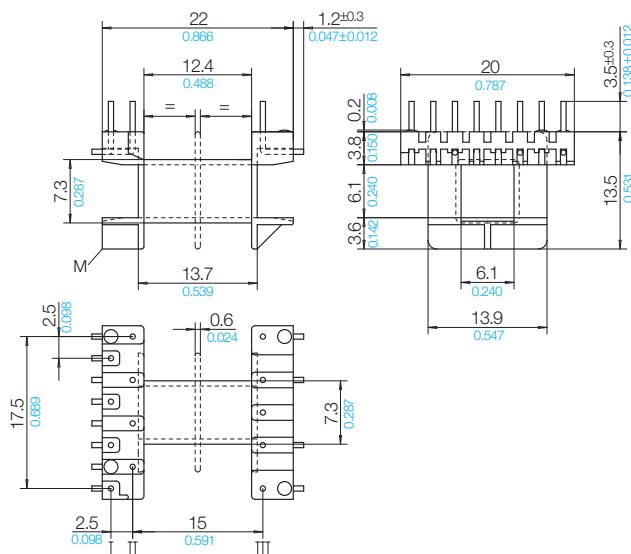

**Grid**  
View pin-side



01 B 3 S / 01 B 2 G

### © 01/2023 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale



Valid version of  
data sheet online

QR Online-Version

### NORWE GmbH

Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

Telefon +49 (0) 27 63-807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

### NORWE Inc.

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)