


ETD Safety Class with Spacers DR


Spacers are made in gfr Polyamide PA66 of type A RV250 nat. (RTI long-range temperature +100°C), or gfr Polyethylene Terephthalate PET of type SKYT.5220FR (RTI long-range temperature +155°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

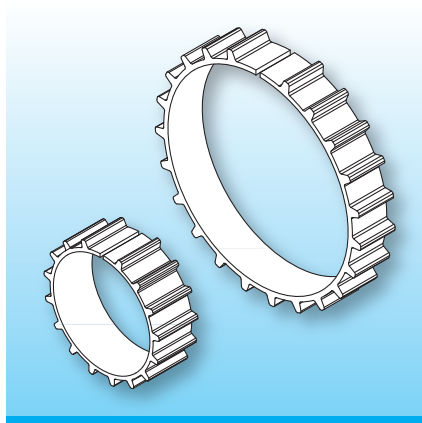

The application of spacers DR in round winding section is advantageous for achieving required creepage and clearances between primary and secondary, and to the core. The spacers can be used cumulative for all dimensions.

When ordering please quote type and order-code.

Material A RV250 nat.	Order-Code	Material SKYT.5220FR	Order-Code	A	B	C
DR 12/4/1.5/A RV250 nat.	94064-106	DR 12/4/1.5/SKYT.5220FR	94064-186	1.5 0.059	4.0 0.157	12.0 0.472
DR 15/4/1.5/A RV250 nat.	94065-106	DR 15/4/1.5/SKYT.5220FR	94065-186	1.5 0.059	4.0 0.157	15.0 0.591
DR 18/4/1.5/A RV250 nat.	94066-106	DR 18/4/1.5/SKYT.5220FR	94066-186	1.5 0.059	4.0 0.157	18.0 0.709
DR 21/4/1.5/A RV250 nat.	94067-106	DR 21/4/1.5/SKYT.5220FR	94067-186	1.5 0.059	4.0 0.157	21.0 0.827
DR 24/4/1.5/A RV250 nat.	94068-106	DR 24/4/1.5/SKYT.5220FR	94068-186	1.5 0.059	4.0 0.157	24.0 0.945
DR 27/4/1.5/A RV250 nat.	94069-106	DR 27/4/1.5/SKYT.5220FR	94069-186	1.5 0.059	4.0 0.157	27.0 1.063

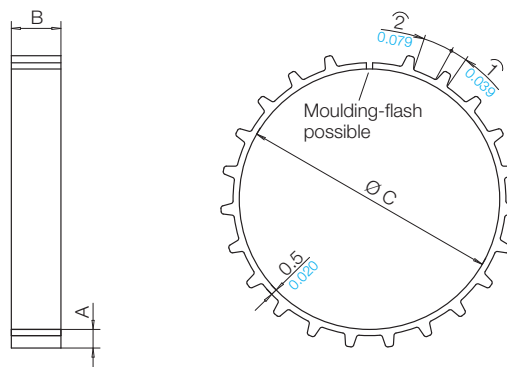

© 09/2022 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Valid version of data sheet online

QR Online-Version

NORWE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

ETD Safety Class with Spacers DR


Spacers are made in gfr Polyamide PA66 of type A RV250 nat. (RTI long-range temperature +100°C), or gfr Polyethylene Terephthalate PET of type SKYT.5220FR (RTI long-range temperature +155°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

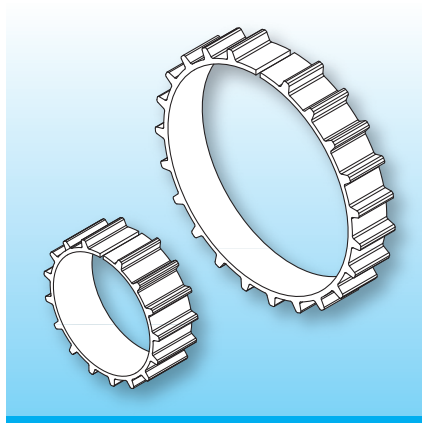

The application of spacers DR in round winding section is advantageous for achieving required creepage and clearances between primary and secondary, and to the core. The spacers can be used cumulative for all dimensions.

When ordering please quote type and order-code.

Material A RV250 nat.	Order-Code	Material SKYT.5220FR	Order-Code	A	B	C
DR 12/6/1.5/A RV250 nat.	94084-106	DR 12/6/1.5/SKYT.5220FR	94084-186	1.5 0.059	6.0 0.236	12.0 0.472
DR 15/6/1.5/A RV250 nat.	94085-106	DR 15/6/1.5/SKYT.5220FR	94085-186	1.5 0.059	6.0 0.236	15.0 0.591
DR 18/6/1.5/A RV250 nat.	94086-106	DR 18/6/1.5/SKYT.5220FR	94086-186	1.5 0.059	6.0 0.236	18.0 0.709
DR 21/6/1.5/A RV250 nat.	94087-106	DR 21/6/1.5/SKYT.5220FR	94087-186	1.5 0.059	6.0 0.236	21.0 0.827
DR 24/6/1.5/A RV250 nat.	94088-106	DR 24/6/1.5/SKYT.5220FR	94088-186	1.5 0.059	6.0 0.236	24.0 0.945
DR 27/6/1.5/A RV250 nat.	94089-106	DR 27/6/1.5/SKYT.5220FR	94089-186	1.5 0.059	6.0 0.236	27.0 1.063

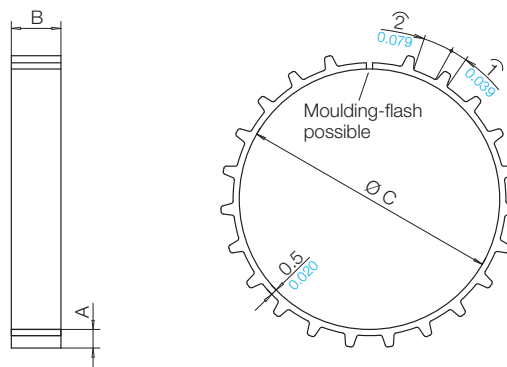

© 09/2022 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Valid version of data sheet online

QR Online-Version

NORWE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com