


## Standard RM 45° with Dual-in-Line solder-tags

The coilformers are made in gfr Polybutylene Terephthalate PBT of type pcg (RTI long-range temperature +130° C).

Tag material: brass, tinned.

Maximum solder temperature 350° C, 2 sec.


Special materials – eg. irradiated cross-linked – and designs on request, dimensions in mm/inch.

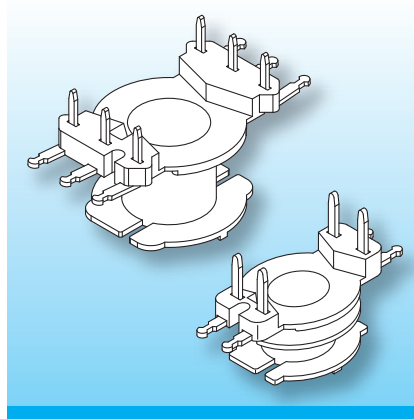


The coilformers have up to 3 solder-tags dual-in-line. Binding-on can be done radially. Tension relief for thin wire or litz is achieved by bending the tag-sides towards the winding section.

A tolerance-compensator (TA) on the top flange eliminates the normally used spring-washer.

Type	Order-Code	Accessories
Coilformer: RM 5/1k/4-s/pcg	60150-047	
Coilformer: RM 5/2k/4-s/pcg	60151-047	
Solder-tag: s2/wd	75010-261	

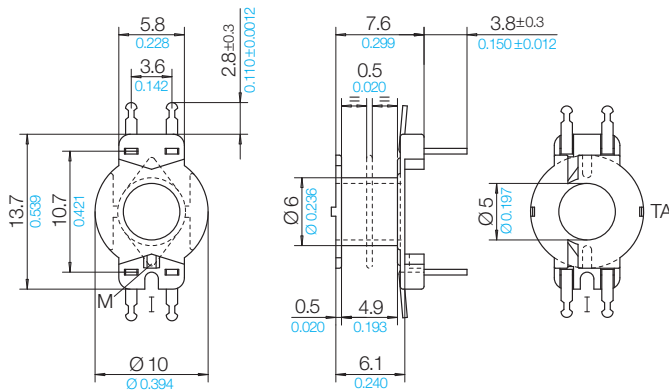

## Grid View tag-side



### © 09/2012 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale



Valid version of  
data sheet online

QR Online-Version

### NORWE GmbH

Postfach 13 56

51691 Bergneustadt

Paulstraße 5, Pernze

51702 Bergneustadt

Deutschland

Telefon +49 (0) 27 63-807-0

Telefax +49 (0) 27 63-807-77

E-mail verkauf@norwe.de

Internet www.norwe.de

www.norwe.eu

### NORWE Inc.

P.O. Box 25 11

North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113

Telefax +1-330 305-0592

E-mail usa@norwe.com

Internet www.norwe.com