


TR-SMD


Surface Mount Bases (fu)

The surface-mount bases (fu) are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering. Pin material: tin bronze, tinned. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

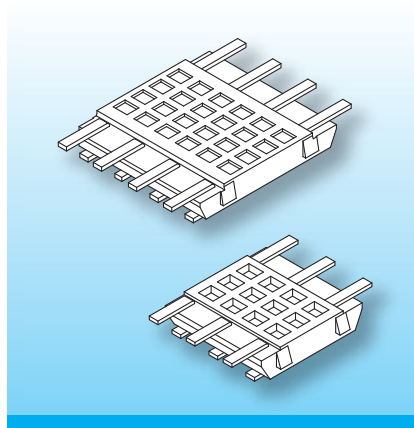


The bases are fitted with 6 to 10 U-shaped terminals. The two sides of the terminal allow automatic binding-on and soldering of the wires, leaving the pcb-side of the terminal free from tin. Surface mount bases are suitable to carry glued-on small toroidal windings or other small electronic components. This then allows automatic assembly of pcbs when fitted with Pick and Place Caps.

Type	Order-Code	Accessories
Surface mount base: TR-SMD2/6/6f-625-/torA504	94311 - 132	Pick and Place Cap P-GP 6-3.4
Solder-pin: fu625-67/ub	75826 - 213	Pick and Place Cap P-GP 6-5.4
		Pick and Place Cap P-GP 6-7.4

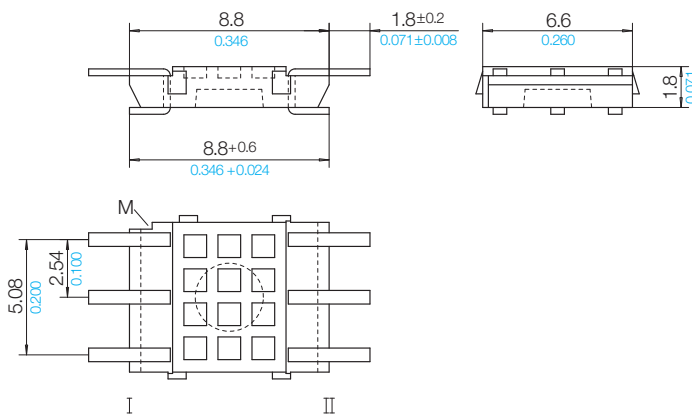

Pin Connecting Surface View pin-side



© 08/2011 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com