


TR-SMD

Surface Mount Bases (fm)


The surface mount bases (fm) are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering.

Pin material: tin bronze, tinned.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch).

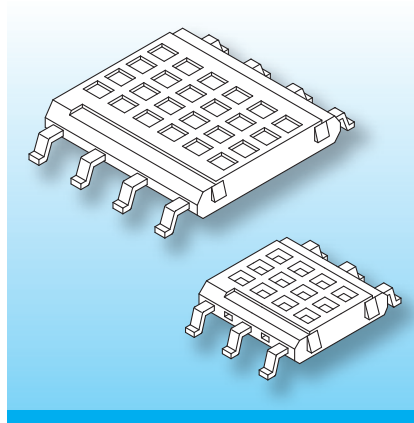


The bases are fitted with 6 to 10 “gull-wing” type terminals, and are suitable to carry glued-on small toroidal windings or other small electronic components. This then allows automatic assembly of pcbs when fitted with Pick and Place Caps.

Type	Order-Code	Accessories
Surface mount base: TR-SMD1/4/6f-625-/torA504	9 4 3 1 5 - 1 3 2	Pick and Place Cap P-GP 4-2.4
Solder-pin: fm625-35/ub	7 5 8 0 2 - 2 1 3	Pick and Place Cap P-GP 4-4.4
		Pick and Place Cap P-GP 4-6.4

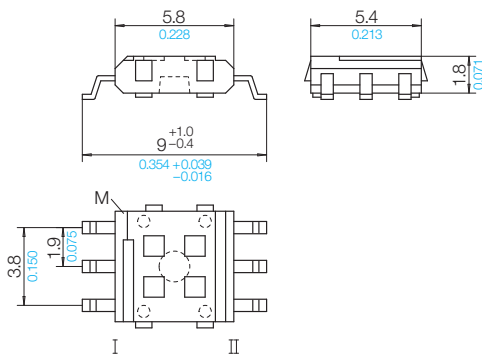

Pin Connecting Surface

View pin-side



© 08/2011 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com