


## TR-SMD

### Surface Mount Bases (fm)


The surface mount bases (fm) are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering.

Pin material: tin bronze, tinned.  
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch).

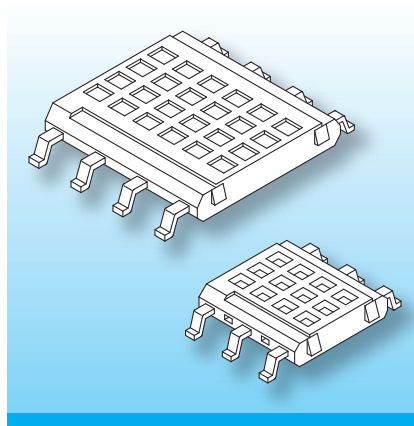


The bases are fitted with 6 to 10 “gull-wing” type terminals, and are suitable to carry glued-on small toroidal windings or other small electronic components. This then allows automatic assembly of pcbs when fitted with Pick and Place Caps.

Type	Order-Code	Accessories
Surface mount base: TR-SMD1/6/6f-625-/torA504	9 4 3 1 6 - 1 3 2	Pick and Place Cap P-GP 6-3.4
Solder-pin: fm625-35/ub	7 5 8 0 2 - 2 1 3	Pick and Place Cap P-GP 6-5.4
		Pick and Place Cap P-GP 6-7.4

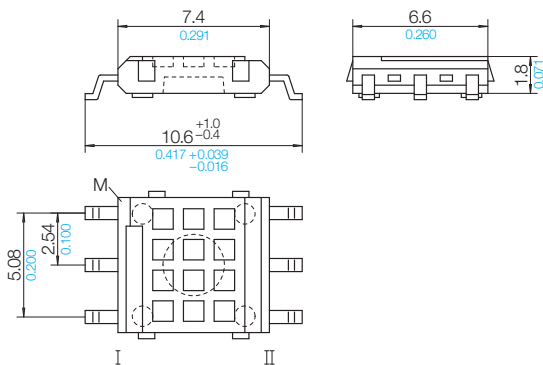

### Pin Connecting Surface

View pin-side



#### © 08/2011 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale

#### NORWE GmbH

Postfach 13 56  
51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland  
Telefon +49 (0) 27 63-807-0  
Telefax +49 (0) 27 63-807-77  
E-mail verkauf@norwe.de  
Internet www.norwe.de  
www.norwe.eu

#### NORWE Inc.

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America  
Telefon +1-330 497-8113  
Telefax +1-330 305-0592  
E-mail usa@norwe.com  
Internet www.norwe.com