


EE-SMD-Coilformers (fu)

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering.
Pin Material: tin bronze, tinned.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

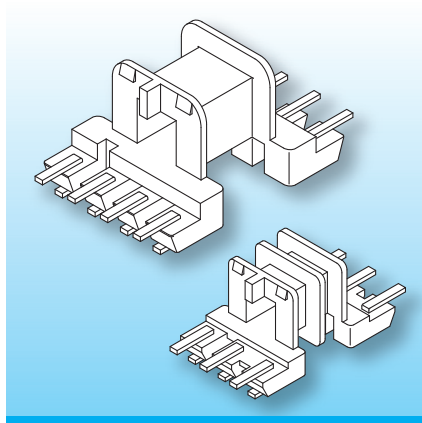

The coilformers have U-shaped terminals. This allows automatic binding-on of the wires, and after soldering leaves the pcb-side of the terminal clean and free from tin. The coilformers are available with single or double section. Automatic placing of the coilformers is possible by using a Pick and Place Cap.

Type


Coilformer: EE 20-SMD2/1k/18f-640-/torA504
Coilformer: EE 20-SMD2/2k/18f-640-/torA504
Solder-pin: fu640-85/ub

Order-Code


N0525-132 
N0526-132 
N0347-213 

Accessories

Pick and Place Cap P-EE 20
Spring-Clip SB-EF/E 20

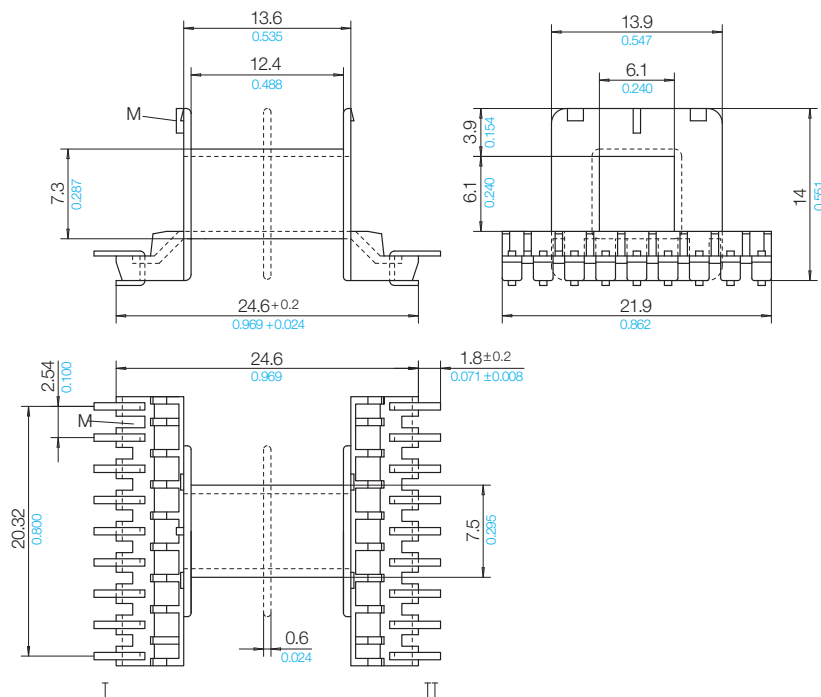

Pin Connecting Surface View pin-side

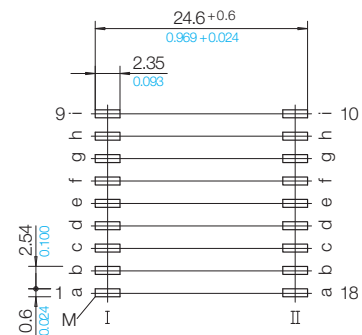

© 03/2014 by NORWE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version