

**Components for
Power Conversion EP-Series**



This catalogue contains information on all our products of the EP-Series

EP cores allow the design of transformers with high inductance, requiring only small space. The compact design also minimizes stray-fields. We supply coilformers made in high quality thermoplastics, matching your production requirements. This catalogue also contains data of clips, which may be required to secure the ferrites.

Wherever high-temperature soldering processes are used in connection with EP-series coilformers, we recommend radiation cross-linked plastics. This ensures that the mechanical properties – in particular those of gfr-polyamides – are maintained and breakages are reduced. For this reason NORWE offers all plastic components of the EP-series in irradiated cross-linked materials. Basically a cross-link enhancer is added to the thermoplast. The thermoplastic components are then exposed to Beta and/or Gamma radiation and cross-linking takes place.

Through cross-linking the material loses its thermoplastic characteristics. It is, however, not a thermoset material. In the short term, the cross-linked materials can be exposed to very high temperatures. Apart from improved aspects in production there may be interesting cost advantages.

Fully tagged or pinned coilformers are – in small quantities – usually available from stock. We can also quote for coilformers with pins or tags fitted to your requirements. All lead-times are relatively short. Our extensive range of modular tooling allows almost unlimited constructional changes to meet customers specification, often by simple changes of tool inserts. In addition the modular tooling system allows extremely short tooling times and can be very cost effective.

All dimensions in mm/inch. The permissible deviations according to DIN 16901 apply as tolerances. Should you need further assistance, be it technical or to assist when planning your order, we look forward to hearing from you.

© 03/2012 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56

51691 Bergneustadt

Paulstraße 5, Pernze

51702 Bergneustadt

Deutschland

Telefon +49 (0) 27 63-807-0

Telefax +49 (0) 27 63-807-77

E-mail verkauf@norwe.de

Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11

North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113

Telefax +1-330 305-0592


E-mail usa@norwe.com

Internet www.norwe.com

EP-Ferrite Cores

The tables below show the dimensions of the ferrite cores for the coilformers shown in this catalogue. The data can be used as an orientation in the design of application specific converters.

Specific details on the ferrite cores and materials should be available from the catalogues of the ferrite manufacturers.

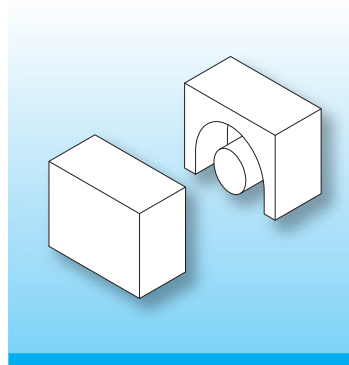


- l_e - effective length
- A_e - effective area
- A_{min} - core cross section
- V_e - effective volume

Dimensions in mm/inch.

Magnetic Characteristic/per set Type:	l_e mm / inch	A_e mm ² / inch ²	A_{min} mm ² / inch ²	V_e mm ³ / inch ³
EP 7	15.7 0.618	10.3 0.016	8.5 0.013	162 0.010
EP 10	19.2 0.756	11.3 0.018	8.5 0.013	217 0.013
EP 13	24.2 0.953	19.5 0.030	14.9 0.023	472 0.029
EP 17	28.5 1.122	33.9 0.053	25.5 0.040	966 0.059
EP 20	40.0 1.575	78.0 0.121	60.0 0.093	3120 0.190

Type	A	B	C	D	E	F	G
EP 7	9.4-0.4 0.370-0.016	7.5-0.2 0.295-0.008	3.40-0.20 0.134-0.008	6.50-0.3 0.256-0.012	7.2+0.4 0.283+0.016	1.7±0.1 0.067±0.004	5.0+0.4 0.016+0.016
EP 10	11.8-0.6 0.465-0.024	10.4-0.2 0.409-0.008	3.45-0.30 0.136-0.012	7.85-0.4 0.309-0.016	9.2+0.4 0.362+0.016	1.85±0.1 0.073±0.004	7.2+0.4 0.283+0.016
EP 13	12.8-0.6 0.504-0.024	13.0-0.3 0.512-0.012	4.50-0.30 0.177-0.012	9.00-0.4 0.354-0.016	9.7+0.6 0.382+0.024	2.4±0.1 0.094±0.004	9.0+0.4 0.354+0.016
EP 17	18.4-0.8 0.724-0.031	17.0-0.6 0.669-0.024	5.85-0.35 0.230-0.014	11.25-0.3 0.443-0.012	11.6+0.8 0.457+0.031	3.25±0.1 0.128±0.004	11.0+0.6 0.433+0.024
EP 20	24.5-1.0 0.965-0.039	21.6-0.4 0.850-0.016	9.00-0.50 0.354-0.020	15.30-0.7 0.602-0.028	16.1+0.8 0.634+0.031	4.5±0.2 0.177±0.008	14.0+0.6 0.551+0.024

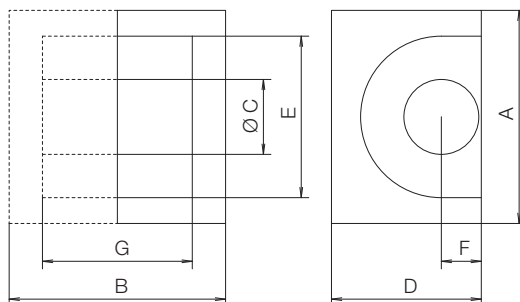

© 03/2012 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com

Thermoplastic Materials

The following survey contains supplementary information on the different thermoplastic-qualities. The material quality orientates to the conventional use of the components. For technical reasons alternative materials cannot be used for all articles. Consult our qualified specialists regarding your individual material requests – we will be pleased to check whether your material requirements can be realized. Further information on the materials can also be obtained from our homepage (e.g. to call up the UL cards).

NORWE Mat.-Code	NORWE Mat.-Description	Chemical Symbol	Tradename Manufacturer	UL-File-No.	Flammability Rating acc. UL	RTI Elec acc. UL
017	x2g5	PA66 Polyamide 66	A3X2G5 Ultramid BASF AG	E 41871	V-0 (0.81)	+120°C
039	A3X2G5 sv.	PA66 Polyamide 66	A3X2G5 cross-linked Ultramid BASF AG	-	-	(+120°C)
087	rtg nat.	PET Polyethylene Terephthalate	FR 530 L Rynite DuPont	E 41938	V-0 (0.35)	+155°C
096	TE 250 F6	PA46 Polyamide 46	TE250F6 Stanyl DSM	E 47960	V-0 (0.35) V-0 (0.75)	+ 65°C +140°C
243	Zen.6130L, black	LCP Liquid Crystal Polymer	6130L black Zenite TICONA	E 344082	V-0 (0.38)	+240°C

Explanations on the above survey of materials:

- NORWE Mat.-Code designates the number NORWE fixed for the material
- NORWE Mat.-Description names the NORWE-abbreviation for the material
- Chemical Symbol classifies the chemical product group of the material
- Tradename designates the product name or trade name fixed by the manufacturer
- Manufacturer name of manufacturer
- UL-File-No. material quality tested and certified with respect to safety and flammability. The manufacturers of certified and approved products receive a so-called recognition card (yellow card) in which the product qualities are listed in detail. You find all relevant yellow cards – also called UL cards – for different material qualities on our homepage or you can obtain them from us.
- Flammability Rating acc. UL . . . determines the flammability of thermoplastic materials based on burning tests in accordance with UL 94 considering the wall thickness of the material.
- RTI Elec acc. UL Relative Temperature Index according to UL 746 B. The specified temperatures are valid for long-range electrical load (Elec).

© 03/2012 by NORWE GmbH

All dimensions in mm/inch
The permissible deviations according to DIN 16901 apply as tolerances
Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com

**NORWE**[®]

© 04/2014 by NORWE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com



Contact to NORWE

NORWE – online

All informations, product specifications, latest news and as well our extensive service offering you find on our up-to-date websites.

Up-to-date product database

- enlarged, sophisticated search function
- comprehensive product survey
- Product Data Sheets as PDF-download
- complete product-catalogues as PDF-download

www.norwe.de

www.norwe.com

Up-to-date contacts

- contacts all over the world

www.norwe.eu

Up-to-date information

- data and facts of the company
- presence on trade fairs all over the world
- product innovations
- material database with UL-cards

www.coilformers.info

www.carretes.eu

Individual special designs

- problem solutions orientated to industries' demands

www.carreteis.info

Current certifications

- EN ISO 9001:2008
- UL 746 D
- EN ISO 14001:2005
- AEOC

www.spulenkoerper.info

www.karkasi-katushek.info

Services

- qualified advice
- cost neutral sample request
- individual quotation request
- mobile access via QR-Code

www.corpi-bobina.info

© 05/2012 by NORWE GmbH

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com



Contact to NORWE