


## EP-Coilformers with Solder-pins

The coilformers are made in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature +155°C).


Pin material: tin bronze, tinned.


Maximum solder temperature 350°C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

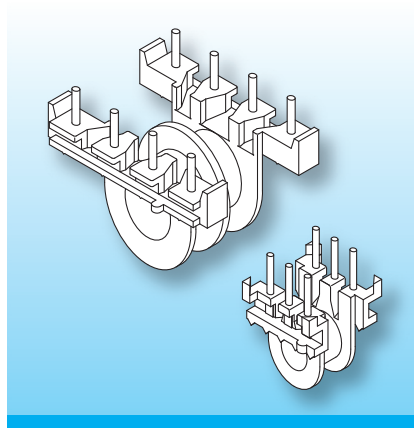

The coilformers are fitted with straight pins. Binding-on of the wires is axially. The terminal strips usually feature “noses” which provide tension-relief, and “stand-offs” which allow clean soldering of the wires and of the coilformer onto the pcb.

Type	Order-Code	Accessories
Coilformer: EP 17/1k/8-6/5.08-gg/rtg	90064-087	Spring-Clip SB-EP 17
Coilformer: EP 17/2k/8-6/5.08-gg/rtg	N0200-087 	
Coilformer: EP 17/1k/8-8/5.08-gg/rtg	90067-087	
Coilformer: EP 17/2k/8-8/5.08-gg/rtg	90068-087	
Solder-pin: z607/ua	73263-212	
Solder-pin: z807/ua	73293-212	

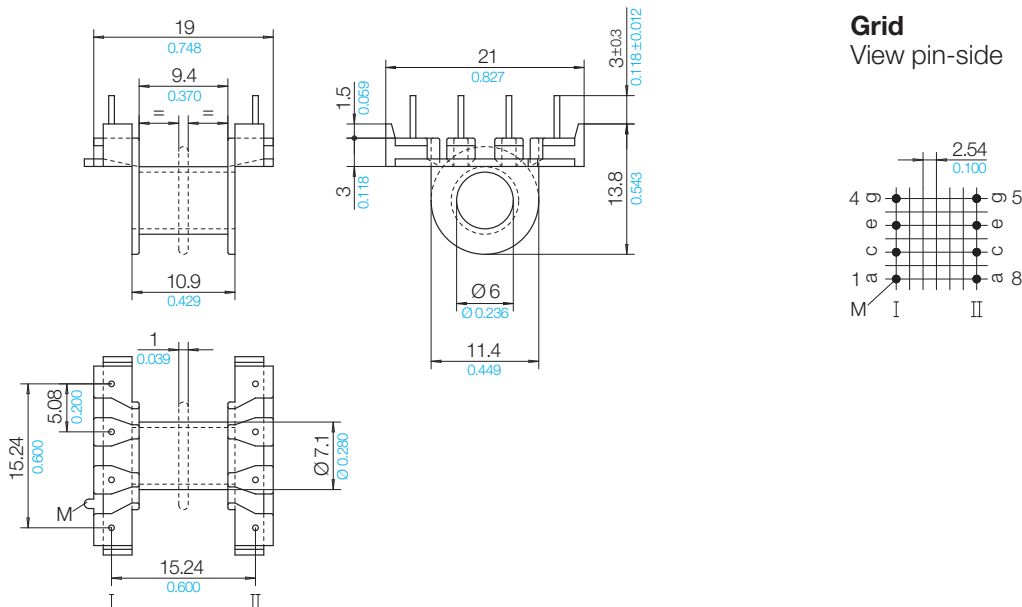

### © 03/2012 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale

### NORWE GmbH

Postfach 13 56

51691 Bergneustadt

Paulstraße 5, Pernze

51702 Bergneustadt

Deutschland

Telefon +49 (0) 27 63-807-0

Telefax +49 (0) 27 63-807-77

E-mail verkauf@norwe.de

Internet www.norwe.de

www.norwe.eu

### NORWE Inc.

P.O. Box 25 11

North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113

Telefax +1-330 305-0592

E-mail usa@norwe.com

Internet www.norwe.com