


Housing (d) for M, EJ,UJ Coilformer elements

The components are made in grf Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.




The housings are sorted according to size and type. The coilformer elements are each inserted from two sides into the housing.

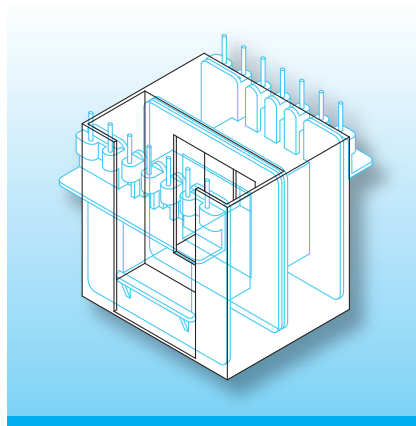

When using design **B**, a housing **d** is required to ensure the creepage and clearance distances between the primary and the secondary windings and between the windings and the core assembly.

When ordering, please quote type and order-code.

Type	Order-Code	A	B	C
M 55/d/p6g	03692-024	36.4 / 1.433	37.7 / 1.484	44.8 / 1.764
EJ 38/d/p6g	07597-024	19.0 / 0.748	25.6 / 1.008	28.6 / 1.126
EJ 42/d/p6g	07614-024	20.5 / 0.807	27.6 / 1.087	30.6 / 1.205
EJ 48/d/p6g	07713-024	23.8 / 0.937	31.7 / 1.248	34.8 / 1.370
EJ 54/d/p6g	07824-024	26.7 / 1.051	35.7 / 1.406	38.8 / 1.528
EJ 60/d/p6g	07913-024	39.8 / 1.567	29.8 / 1.173	43.8 / 1.724
EJ 66/d/p6g	08013-024	32.6 / 1.283	43.8 / 1.724	47.8 / 1.882
EJ 78/d/p6g	08113-024	38.7 / 1.524	51.9 / 2.043	57.3 / 2.256
EJ 84a/d/p6g	08213-024	41.1 / 1.618	55.4 / 2.181	61.2 / 2.409
EJ 84b/d/p6g	08313-024	41.1 / 1.618	55.5 / 2.185	75.4 / 2.969



© 07/2012 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Valid version of
data sheet online

QR Online-Version

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com