


Classical Notched Press-Fit Solder-Pins (m)


with stamped notches, are made from drawn wire. The cut cross-sections are bare. This type of pin is preferred when pinning small quantities of components manually. Because of the notches this pin has limited use when pinning brittle plastic components.

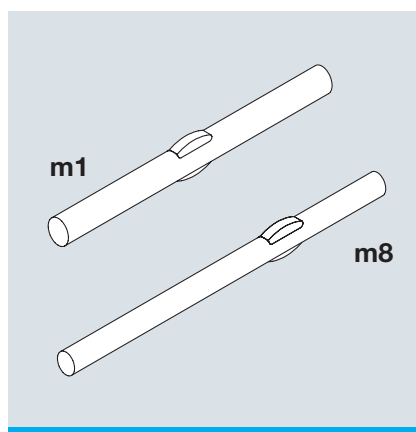

The material of the pins is tin bronze CuSn 6, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code	G	B	C
m6	m609/ua	70229-212	9.0 / 0.354	4.5 / 0.177	4.5 / 0.177
	m610/ua	70118-212	10.0 / 0.394	5.0 / 0.197	5.0 / 0.197
	m611/ua	70231-212	11.0 / 0.433	5.5 / 0.217	5.5 / 0.217
	m612/ua	70124-212	12.0 / 0.472	6.0 / 0.236	6.0 / 0.236
	m613/ua	70233-212	13.0 / 0.512	6.5 / 0.256	6.5 / 0.256
	m614/ua	70119-212	14.0 / 0.551	7.0 / 0.276	7.0 / 0.276
	m615/ua	70235-212	15.0 / 0.591	7.5 / 0.295	7.5 / 0.295
m8	m616/ua	70236-212	16.0 / 0.630	8.0 / 0.315	8.0 / 0.315
	m808/ua	70173-212	8.0 / 0.315	4.0 / 0.157	4.0 / 0.137
	m810/ua	70158-212	10.0 / 0.394	5.0 / 0.197	5.0 / 0.197
	m811/ua	70150-212	11.0 / 0.433	5.5 / 0.217	5.5 / 0.217
	m812/ua	70156-212	12.0 / 0.472	6.0 / 0.236	6.0 / 0.236
	m813/ua	70154-212	13.0 / 0.512	6.5 / 0.256	6.5 / 0.256
	m81307/ua	70185-212	20.0 / 0.787	13.0 / 0.512	7.0 / 0.276
	m814/ua	70155-212	14.0 / 0.551	7.0 / 0.276	7.0 / 0.276
	m815/ua	70160-212	15.0 / 0.591	7.5 / 0.295	7.5 / 0.295
	m816/ua	70184-212	16.0 / 0.630	8.0 / 0.315	8.0 / 0.315
	m82406/ua	70149-212	30.0 / 1.181	24.0 / 0.945	6.0 / 0.236
	m82806/ua	70180-212	34.0 / 1.339	28.0 / 1.102	6.0 / 0.236
m1	m113/ua	70182-212	13.0 / 0.512	6.5 / 0.256	6.5 / 0.256
	m121/ua	70179-212	21.0 / 0.827	10.5 / 0.413	10.5 / 0.413
	m125/ua	70176-212	25.0 / 0.984	12.5 / 0.492	12.5 / 0.492
	m129/ua	70177-212	29.0 / 1.142	14.5 / 0.571	14.5 / 0.571

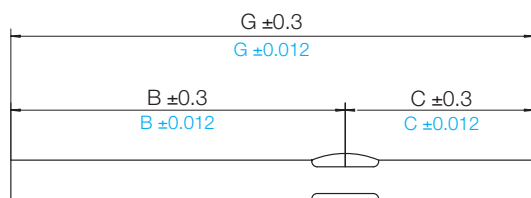

shape	Ø D
m6	0.60 / 0.024
m8	0.80 / 0.031
m1	1.00 / 0.039

© 06/2005 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
D-51691 Bergneustadt

Paulstraße 5, Pernze
D-51702 Bergneustadt

Telefon +49 (0) 27 63-8 07-0
Telefax +49 (0) 27 63-8 07-77
E-mail verkauf@norwe.de
Internet www.norwe.de

NORWE Inc.

P.O. Box 25 11
USA- North Canton, OH 44720-0511

Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com