


Flat Press-Fit Solder-pins (f)



are made and cut from drawn wire. The cut cross-sections are bare. This pin is preferred when pinning in small quantities of components, in particular SMD-Series and potting-boxes.

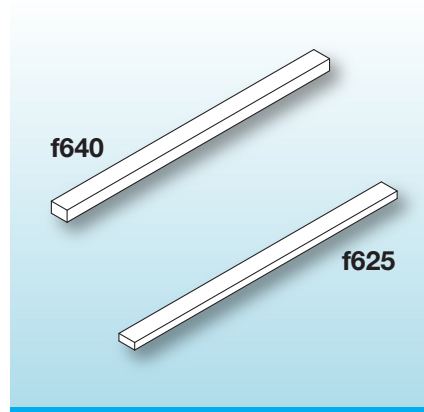

The material of the pins is tin bronze CuSn8, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

| Shape | Type | Order-Code | | G | Shape | Type | Order-Code | | G |
|-------|----------|------------|--|--------------|-------|---------|------------|--|-------------|
| f625 | f625-30 | 75850-213 | | 3.0 / 0.118 | f640 | f640-30 | 75951-213 | | 3.0 / 0.118 |
| | f625-40 | 75854-213 | | 4.0 / 0.157 | | f640-40 | 75955-213 | | 4.0 / 0.157 |
| | f625-50 | 75859-213 | | 5.0 / 0.197 | | f640-50 | 75958-213 | | 5.0 / 0.197 |
| | f625-60 | 75865-213 | | 6.0 / 0.236 | | f640-60 | 75963-213 | | 6.0 / 0.236 |
| | f625-70 | 75870-213 | | 7.0 / 0.276 | | f640-70 | 75970-213 | | 7.0 / 0.276 |
| | f625-80 | 75875-213 | | 8.0 / 0.315 | | | | | |
| | f625-100 | 76078-213 | | 10.0 / 0.394 | | | | | |



| shape | X | Y |
|-------|--------------|--------------|
| f625 | 0.60 / 0.024 | 0.25 / 0.010 |
| f640 | 0.60 / 0.024 | 0.40 / 0.016 |

© 08/2022 by NORWE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Valid version of data sheet online

QR Online-Version

NORWE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com