## M 20 – M 74 / E 70 – E 80
## Horizontal Coilformers

The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C) and x2g5 (RTI long-range temperature +120° C).
Pin material is tin bronze, tinned for solder-pins and brass, tinned for solder-tags.
Max. solder temperature +350° C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

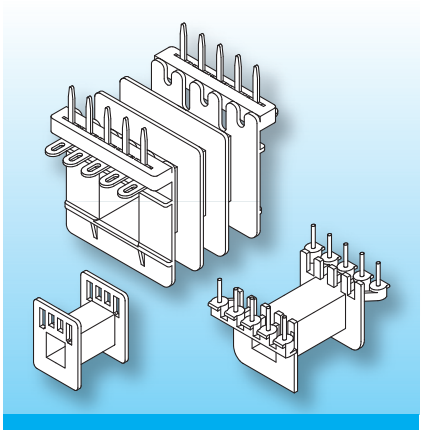

This group of horizontal coilformers is sorted by ferrite core / lamination size and each by pinning with straight pins, side-wrapping pins, solder-tags and conventional coilformers.
Most designs feature terminal strips with “noses” which provide tension-relief of the winding wires and “stand-offs” which allow clean soldering of the coilformer onto the pcb to minimize cold-solder joints. Some coilformers also feature extended flanges to prevent clips sliding off.

| Type | Order-Code | Accessories |
|---|---|---|
| Coilformer: M 42/1k/2g2-/5.0-ko/p6g | 01390-024 | Potting Box M 42 |
| Coilformer: M 42/2k/2g2-/5.0-ko/p6g | 01391-024 | Clip FK-E 42 |
| Coilformer: M 42/3k/2g2-/5.0-ko/p6g | 01392-024 | |
| Solder-tag: g2c/wc | 71070-259 | |

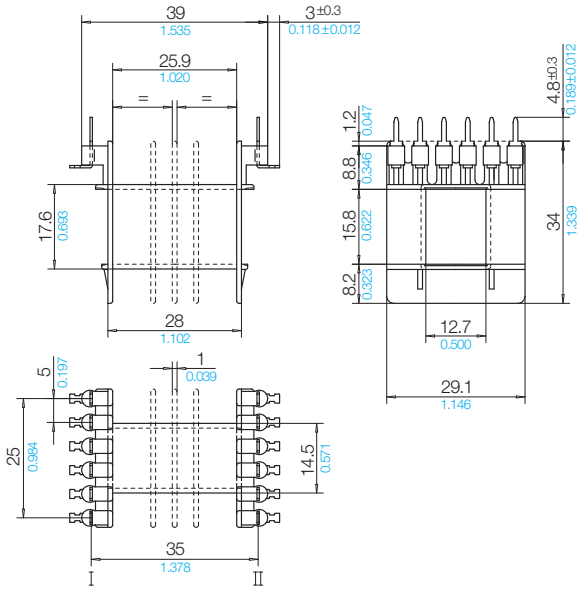


**Grid**
View tag-side




**© 01/2012 by NORWE ONE GmbH**

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

**NORWE ONE GmbH**

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

**NORWE Inc.**

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com