


EE 8 – EE 32 Horizontal


The coilformers are made in gfr Polyamide PA66 of type p6g (RTI +125° C), x2g5 (RTI +120° C), A3X2G10, sw (RTI +115° C) and in gfr Polybutylene Terephthalate PBT of type pcg (RTI +130° C). Pin material: tin bronze, tinned and tag material: brass, tinned. Maximum solder temperature 350° C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

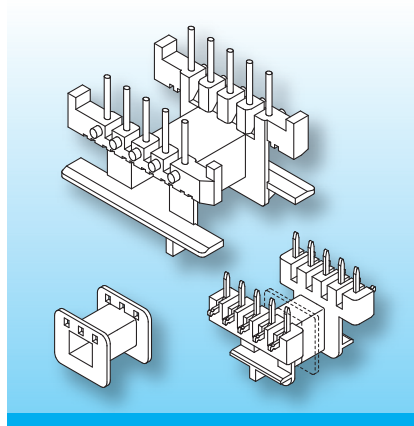

This group of horizontal coilformers is sorted by ferrite core / lamination size and each by pinning with straight pins, side-wrapping pins, solder-tags and conventional coilformers.


Most designs feature terminal strips with “noses” which provide tension-relief of the winding wires and “stand-offs” which allow clean soldering of the coilformer onto the pcb to minimize cold-solder joints. Some coilformers also feature extended flanges to prevent clips sliding off.

Type	Order-Code	Accessories
Coilformer: EE 12.6/1k/7-8/7.5-df/pcg	09750-047	Spring-Clip SB-EF 12.6
Coilformer: EE 12.6/2k/7-8/7.5-df/pcg	09751-047	
Solder-pin: z808/ua	73294-212	

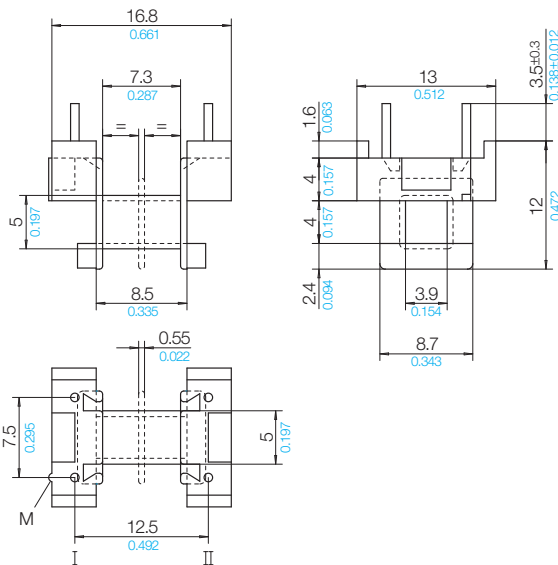

Grid

View pin-side



Stand 12/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com