


Potting Boxes

The potting boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C). Special materials – eg. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

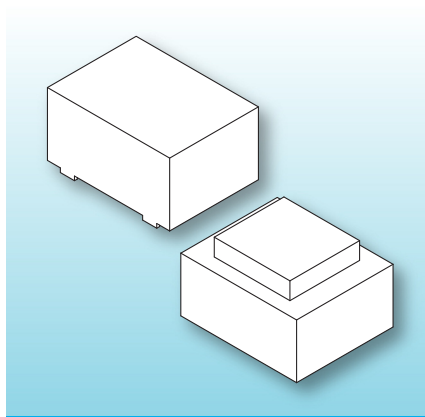


Potting Boxes are required when higher requirements on insulation is specified. Creepage and clearance dimensions are increased. Potting should preferably be under vacuum.


When ordering please quote type and order-code.

Type I	Order-Code	A	B	C		E	F			J
EE 12.6/vla/12.0/p6g	09780-024	14.4	14.4	13.0		13.1	13.1			12.3
		0.567	0.567	0.512		0.516	0.516			0.484
EE 16/vla/14.0/p6g	09880-024	17.8	18.0	14.8		16.6	16.6			14.0
		0.701	0.701	0.583		0.654	0.654			0.551

Type II	Order-Code	A	B	C		E	F			J
EE 20/vlf/14.8/p6g	10099-024	26.0	21.8	15.5		20.4	24.5			14.8
		1.024	0.858	0.610		0.803	0.965			0.583
EE 20/vlf/14.8/p6g	10090-024	26.0	21.8	15.5		20.4	24.5			14.8
		1.024	0.858	0.610		0.803	0.965			0.583
EE 20/vlf/17.8/p6g	10091-024	26.0	21.8	18.5		20.4	24.5			17.7
		1.024	0.858	0.728		0.803	0.965			0.697



Type I



Type II

1) only for
10090
10091

Stand 09/2021 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com




Valid version of
data sheet online

QR Online-Version

Potting Boxes


The potting boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – eg. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

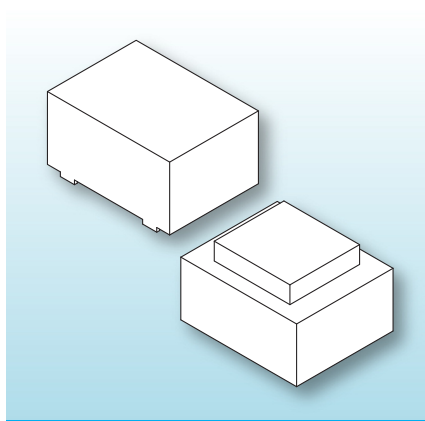

Potting Boxes are required when higher requirements on insulation is specified. Creepage and clearance dimensions are increased. Potting should preferably be under vacuum.

When ordering please quote type and order-code.

Type III	Order-Code	A	B	C	D	E	F	G	H	J
EE 25/vlb/19.2/p6g	10290-024	27.8 1.094	27.8 1.094	20.1 0.791	3.5 0.138	26.2 1.031	26.2 1.031	–	21.0 0.827	19.3 0.760
EE 32/vlb/24.0/p6g	10590-024	35.0 1.378	34.0 1.339	25.0 0.984	5.5 0.217	32.4 1.276	33.4 1.315	29.0 1.142	28.0 1.102	24.0 0.945
M 20/vlb/15.0/p6g	00230-024	22.8 0.898	22.8 0.898	16.0 0.630	3.4 0.134	21.2 0.835	21.2 0.835	–	16.0 0.630	15.0 0.591
M 30/vlc/19.5/p6g	00690-024	32.8 1.291	32.8 1.291	20.3 0.799	5.7 0.224	31.2 1.228	31.2 1.228	23.8 0.937	23.8 0.937	19.5 0.768
M 30/vlc/21.0/p6g	00700-024	32.8 1.291	32.8 1.291	21.8 0.858	5.7 0.224	31.2 1.228	31.2 1.228	23.8 0.937	23.8 0.937	21.0 0.827
M 30/vlc/25.0/p6g	00980-024	32.8 1.291	32.8 1.291	25.8 1.016	5.7 0.224	31.2 1.228	31.2 1.228	23.8 0.937	23.8 0.937	25.0 0.984
M 42/vlc/36.0/p6g	01435-024	46.2 1.819	46.2 1.819	37.2 1.465	8.4 0.331	44.6 1.756	44.6 1.756	33.8 1.331	33.8 1.331	36.3 1.429

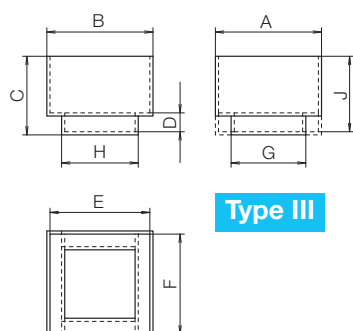

Type III

Stand 09/2021 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version