


RM Power Conversion 45°

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130° C).

Pin material: tin bronze, tinned.

Maximum solder temperature
300°C, 2 sec.


Special materials – eg. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

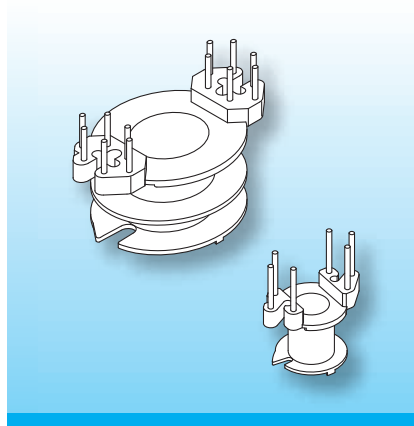

The coilformers are fitted with straight solder-pins. Binding-on of the wires is axially. The wires are guided into the winding room through centrally positioned slots in the lower flange.

A reinforced flange reduces the risk of breakage when binding-on the wire and ensures a tight fit of the solder-pins which are inserted after moulding.

Type	Order-Code	Accessories
Coilformer: RM 12/1k/12-8/torA504	60110-132	
Coilformer: RM 12/2k/12-8/torA504	60210-132	
Solder-pin: z807/ua	73293-212	

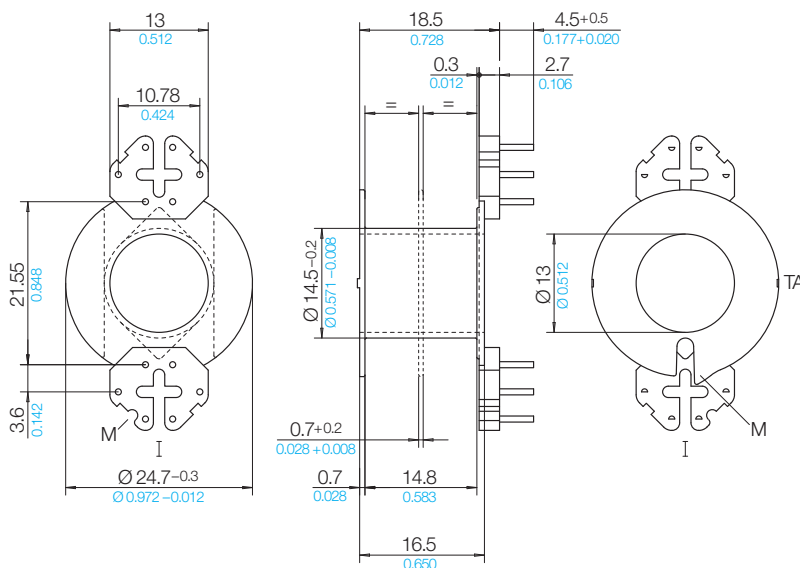

Grid
View pin-side

