


## RM Power Conversion 45°, Specials


The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C).  
Pin material: tin bronze, tinned.  
Maximum solder temperature 350° C, 2 sec.  
Special materials – eg. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

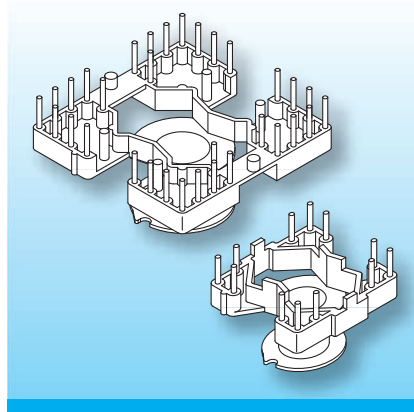

The pin layout on the lower flange of these specially designed coilformers allows simultaneous binding-on and winding of two wires (bi-filar).


Compared with standard RM-coilformers, 12–32 solder-pins are available. In addition, winding and soldering can be done fully automatic.

| Type                                                | Order-Code             | Accessories |
|-----------------------------------------------------|------------------------|-------------|
| Coilformer: RM 6/1k/12-8/p6g<br>Solder-pin: z809/ua | 90031-024<br>73295-212 |             |

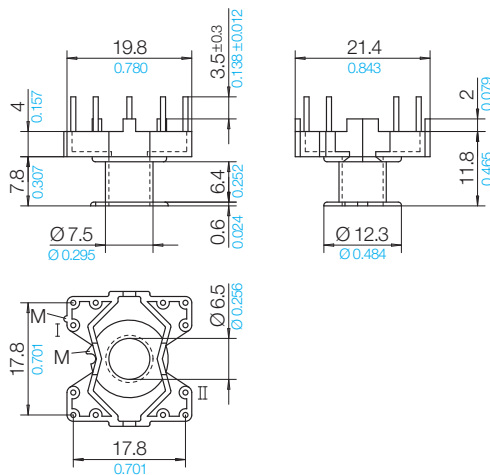

## Grid

View pin-side



Stand 11/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

NORWE ONE GmbH

51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

NORWE Inc.

North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)