


Standard RM, RM-LP Low Profile with Dual-in-Line solder-pins

The coilformers are made in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature +155°C) and one type made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Pin material: tin bronze, tinned. Maximum solder temperature 350°C, 2 sec.

Special materials – eg. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

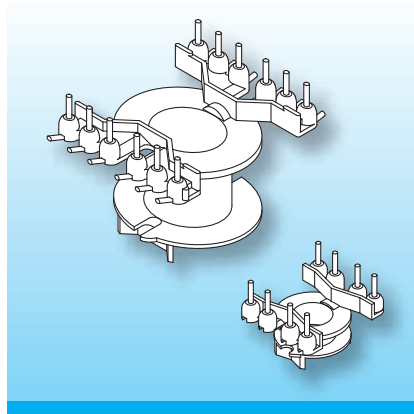


Two types of Dual-in-Line solderpins can be fitted.

L-shaped type h for radial binding on, side wrapping and soldering.

Tension relief for thin or litz wire is possible.

Straight solder-pins type z for axial binding-on and soldering. Less pcb area is required using this solder-pin.

Type	Order-Code	Accessories
Coilformer: RM 12-LP/mF/1k/12-8/kn/rtg	N0141-087	 on request
Solder-pin: h811/ua	73497-212	
Solder-pin: z807/ua	73293-212	

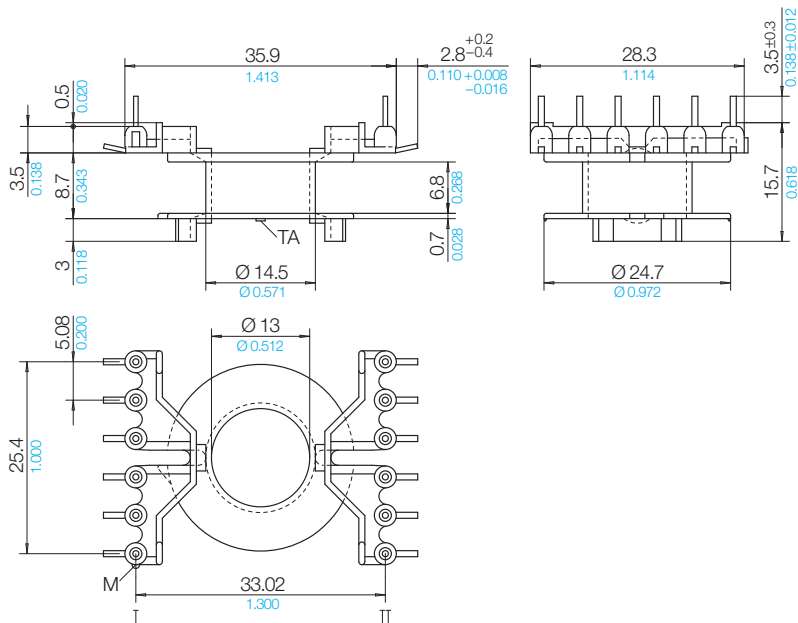

Grid
View pin-side

