



## PQ Coilformers with Dual-in-Line Solder-pins.

The coilformers are made in gfr Polyethylene Terephthalate PET of type SKYT.5220FR (long-range temperature +155°C). Pin material: tin bronze, tinned. Maximum solder temperature 350°C for up to 2 sec. (Special materials – for example radiated cross-linked – and designs on request. Dimensions in mm/[inch](#)).

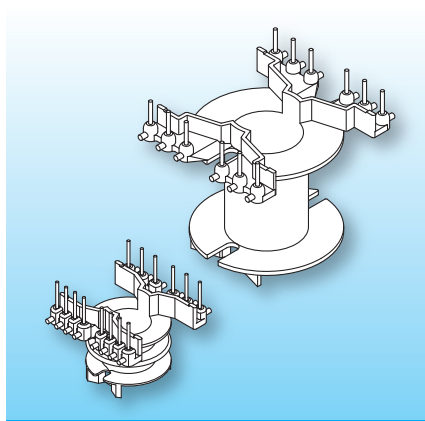


The coilformers with vertical axis are suitable for winding on the latest NC machines. The DIL pin configuration with radial "noses" ensures tension relieved axial binding-on of the wires. "Stand-offs" minimize cold-solder joints into the pcb.

| Type                                      | Order-Code                                                                                    | Accessories |
|-------------------------------------------|-----------------------------------------------------------------------------------------------|-------------|
| Coilformer: PQ 20-20/1k/-6/ii/SKYT.5220FR | 90361-186                                                                                     | on request  |
| Coilformer: PQ 20-20/2k/-6/ii/SKYT.5220FR | N0503-186  |             |
| Solder-pin: z609/ua                       | 73265-212                                                                                     |             |

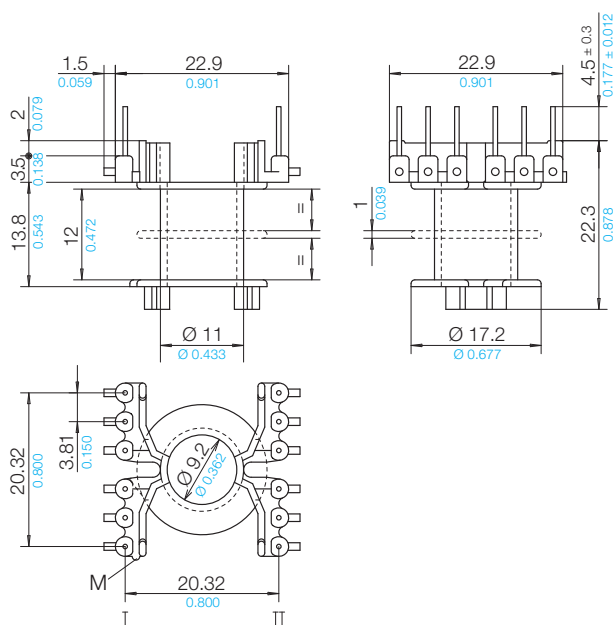

**Grid**  
View pin-side



04 B 0 K

Stand 09/2022 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale



Valid version of  
data sheet online

QR Online-Version

**NORWE ONE GmbH**

Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail verkauf@norwe.de  
Internet www.norwe.de  
www.norwe.eu

**NORWE Inc.**

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail usa@norwe.com  
Internet www.norwe.com