Clips FK-EC

Suitable types of glues, such as Araldite, can be used to put EC cores together. Constant pressure must be maintained on the core-halfes until the glue has hardened. More advantageous and economic are the easily assembled clips FK. They are in stainless steel and can be used for both horizontal and vertical assemblies. The clamping pressure on the core-halfes remains practically constant regardless of temperature, and no pull is exerted on the coilformer.

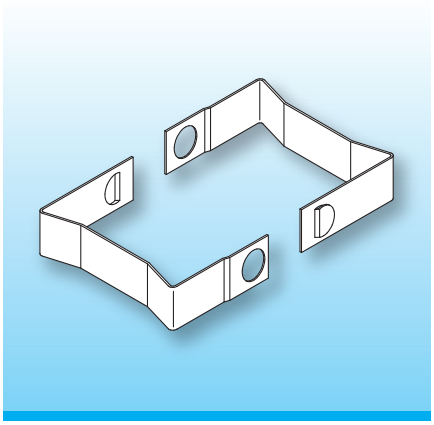

Two clips are required per coilformer. A drop of glue may be used to connect coilformer and ferrite, also preventing frequency-noise. Special materials and design on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Type	Order-Code	A	B	C	D	F
FK-EC 35/sa	78984-085	35.5 1.398	22.2 0.874	8.0 0.315	7.0 0.276	6.2 0.244
FK-EC 41/sa	78985-085	41.8 1.646	24.7 0.972	10.0 0.394	7.0 0.276	6.2 0.244
FK-EC 52/sa	78986-085	53.7 2.114	29.4 1.157	12.0 0.472	7.0 0.276	6.2 0.244
FK-EC 70/sa	N0168-085 on request	71.9 2.831	39.7 1.563	14.0 0.551	7.0 0.276	6.2 0.244

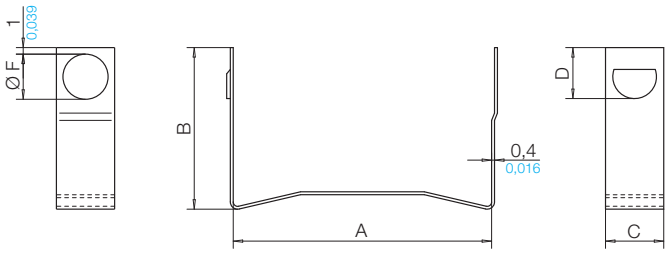

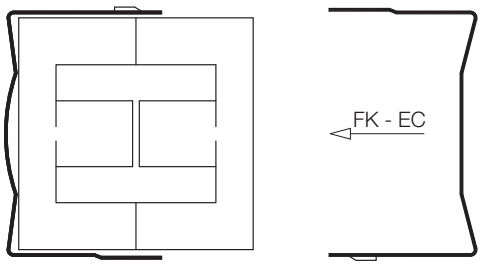

05 A 2 S / 05 A 2 G / 05 A 2 M / 05 A 2 K

© 08/2017 by NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.
P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com