



## PC Coilformers with integral Connecting Boards

The coilformers are made in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature +155°C).  
Pin material: tin bronze, tinned.  
Maximum solder temperature 350°C, 2 sec.  
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

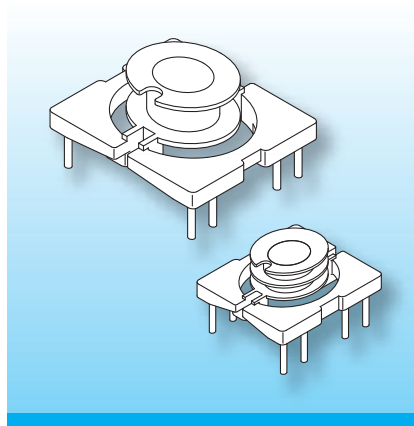


The coils in pot-core assemblies are almost totally enclosed by the ferrite cores, resulting in low leakage and low electromagnetic interference. The integral terminals and channels for routing the wires allow fully automated winding on NC-winding machines. "Stand-offs" allow clean soldering of the wires and of the coilformer onto the pcb.

| Type                                         | Order-Code | Accessories |
|----------------------------------------------|------------|-------------|
| Coilformers with integral Connecting Boards: |            | on request  |
| PC-A 18 x 11/-6/rtg                          | 16084-087  |             |
| PC-A 18 x 11/2k/-6/rtg                       | 16089-087  |             |
| Solder-pin: z606/ua                          | 73262-212  |             |

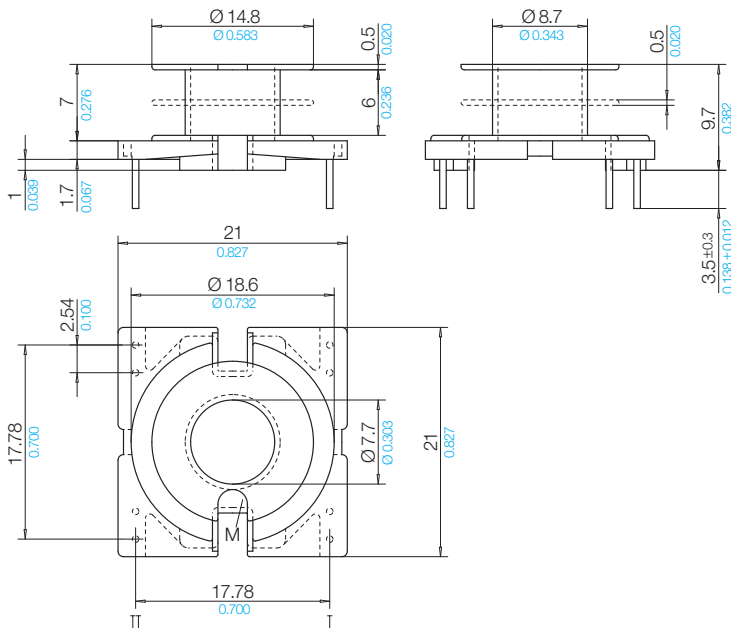

## Grid

View pin-side



Stand 02/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

NORWE ONE GmbH

51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

NORWE Inc.

North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)