


## PC Connecting Boards

The connecting boards are made in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature 155°C).

Pin material: tin bronze, tinned.  
Maximum solder temperature 350°C, 2 sec.



Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

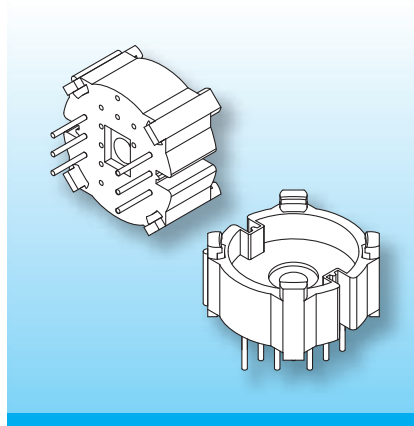


Binding-on of the wires to the connecting board can be done using the NORWE mandrel assembly. The wires are insulated to the ferrite core, routing through side-channels in the connecting board. A snap-in insulating cap completes the pot-core assembly.

| Type                                                       | Order-Code             | Accessories                               |
|------------------------------------------------------------|------------------------|-------------------------------------------|
| Connecting Board: AT 30 x 19/-6/rtg<br>Solder-pin: z608/ua | N0153-087<br>73264-212 | Coilformers 30x19<br>Insulating Cap 30x19 |

 on request

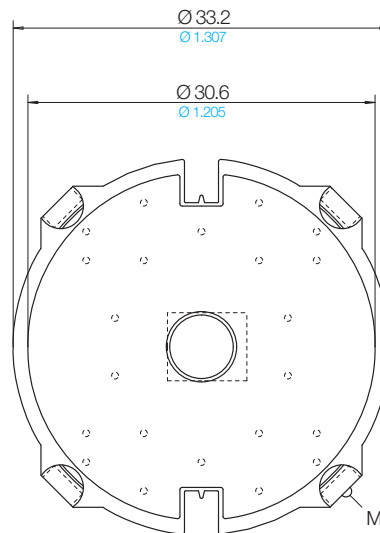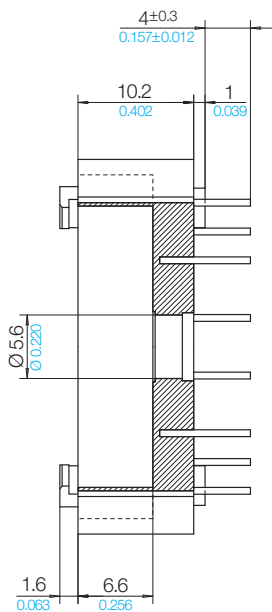

**Grid**  
View pin-side

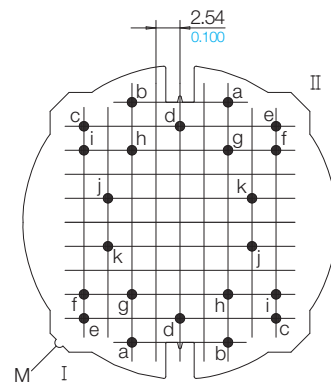

Stand 02/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/*inch*

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

**NORWE ONE GmbH**

51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

**NORWE Inc.**

North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)