


EE-SMD Coilformers (fm)

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature 130°C) and are suitable for reflow soldering.

Pin material: tin bronze, tinned.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*).

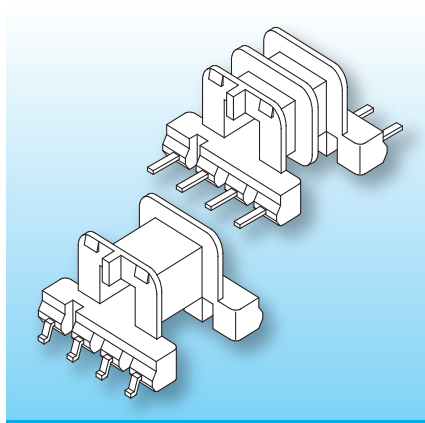


The coilformers have “gull-wing” terminals.

To prevent melt-out, these should ideally be mechanically fixed when soldering on the wires.


The coilformers are available with single or double sections.
Automatic placing of the coilformers is possible by using a Pick and Place Cap.

Type	Order-Code	Accessories
Coilformer: EE 10-SMD1/1k/8f-625-/torA504	92 166 - 132	Pick and Place Cap P-EE 10
Coilformer: EE 10-SMD1/2k/8f-625-/torA504	92 174 - 132	Potting Box EE 10/vla
Solder-pin: fm625-40/ub	75803-213	
Solder-pin: f625-40/ub	75854-213	

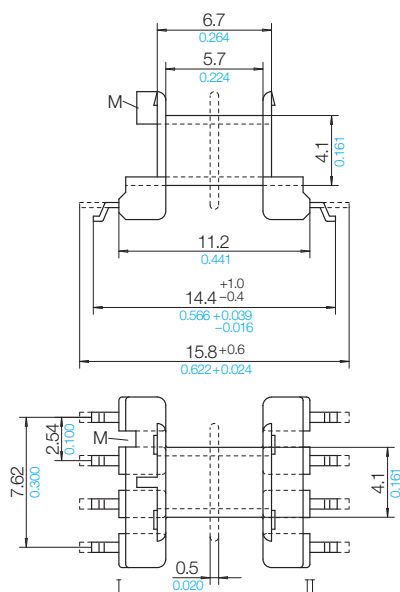

Pin Connecting Surface

View pin-side



Stand 12/2015 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu