


EE-SMD Coilformers (fm)

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature 130°C) and are suitable for reflow soldering.
Pin material: tin bronze, tinned.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch).

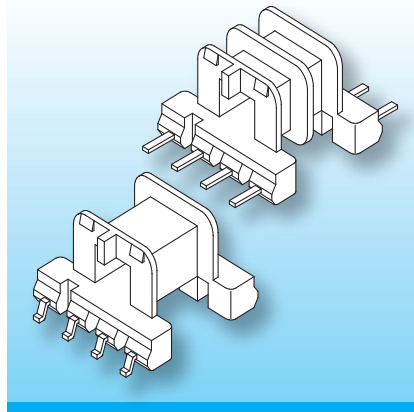


The coilformers have “gull-wing” terminals.

To prevent melt-out, these should ideally be mechanically fixed when soldering on the wires.


The coilformers are available with single or double sections.
Automatic placing of the coilformers is possible by using a Pick and Place Cap.

Type	Order-Code	Accessories
Coilformer: EE 6.3-SMD1/1k/6f-625-/torA504	92168-132	Pick and Place Cap P-EE 5
Coilformer: EE 6.3-SMD1/2k/6f-625-/torA504	92171-132	
Solder-pin: fm625-30/ub	75801-213	
Solder-pin: f625-30/ub	75850-213	

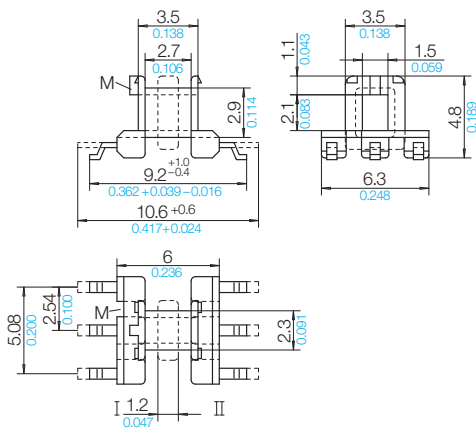

Pin Connecting Surface

View pin-side



Stand 07/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com