



## EE-SMD-Coilformers (fu)

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering.  
Pin Material: tin bronze, tinned.  
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

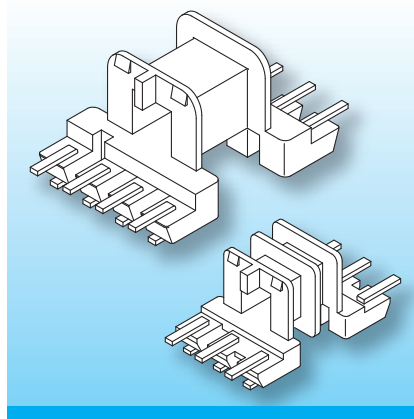


The coilformers have U-shaped terminals. This allows automatic binding-on of the wires, and after soldering leaves the pcb-side of the terminal clean and free from tin.  
The coilformers are available with single or double section.  
Automatic placing of the coilformers is possible by using a Pick and Place Cap.

| Type                                      | Order-Code | Accessories                |
|-------------------------------------------|------------|----------------------------|
| Coilformer: EE 10-SMD2/1k/8f-625-/torA504 | 92266-132  | Pick and Place Cap P-EE 10 |
| Coilformer: EE 10-SMD2/2k/8f-625-/torA504 | 92274-132  |                            |
| Solder-pin: fu625-67/ub                   | 75826-213  |                            |

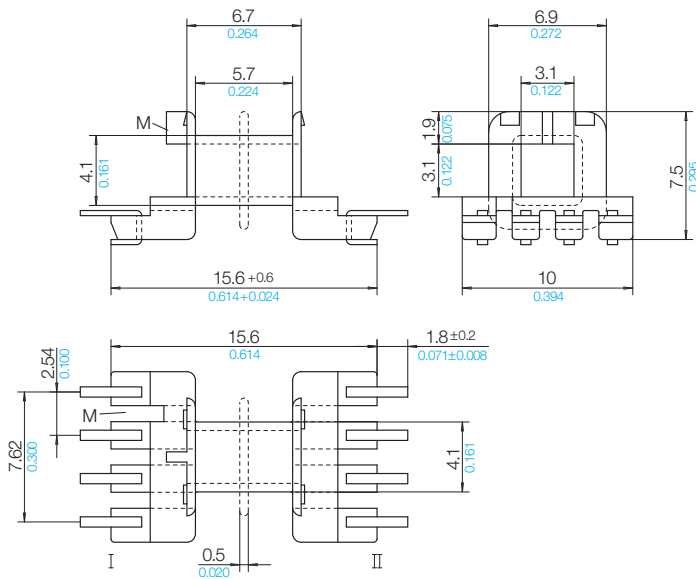

## Pin Connecting Surface View pin-side



Stand 07/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

NORWE ONE GmbH

51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

NORWE Inc.

North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)