VLA-SMD Potting Boxes

The boxes are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130° C) and are suitable for reflow soldering conditions. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

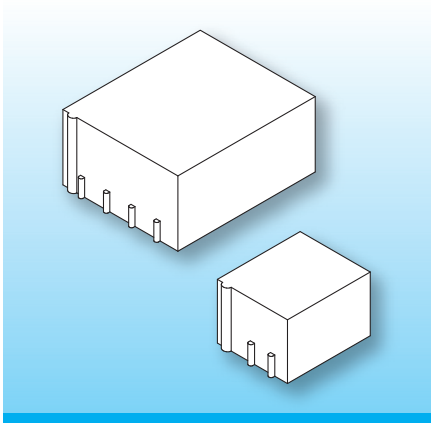

The boxes are suitable for the EE-SMD-coilformers with “gullwing” terminals (fm) and EE-SMD-coilformers with plastic feet design (LP). Exact positioning on the board is achieved by utilizing placement ribs on the outside of the boxes.

When ordering please quote type and order-code.

Type	Order-Code		A	B	C	I
EE 5/vla/4.3/torA504	93090-132		6.6 / 0.260	9.0 / 0.354	4.8 / 0.189	0.5 / 0.020
EE 6.3/vla/4.3/torA504	N0363-132	on request	7.6 / 0.299	9.0 / 0.354	4.8 / 0.189	0.5 / 0.020
EE 8/vla/5.5/torA504	93091-132		9.5 / 0.374	12.4 / 0.488	6.0 / 0.236	0.5 / 0.020
EE 8.8/vla/4.5/torA504	93139-132		10.8 / 0.425	11.6 / 0.457	5.0 / 0.197	0.5 / 0.020
EE 10/vla/7.0/torA504	93092-132		11.6 / 0.457	16.0 / 0.630	7.6 / 0.299	0.6 / 0.024
EE 12.6/vla/8.4/torA504	93093-132		14.6 / 0.575	18.6 / 0.732	9.0 / 0.354	0.6 / 0.024

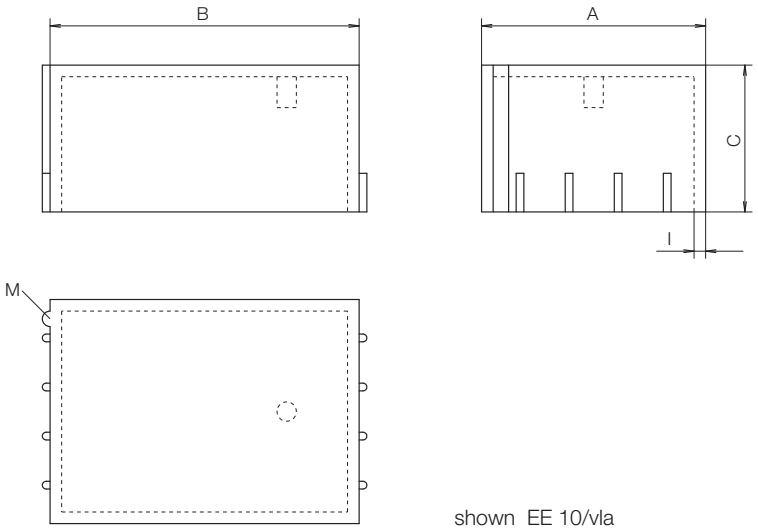

shown EE 10/vla

© 03/2017 by NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.
P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com