



GP-SMD Carriers (fm)

The carriers (fm) are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering.
Pin material: tin bronze, tinned.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*).

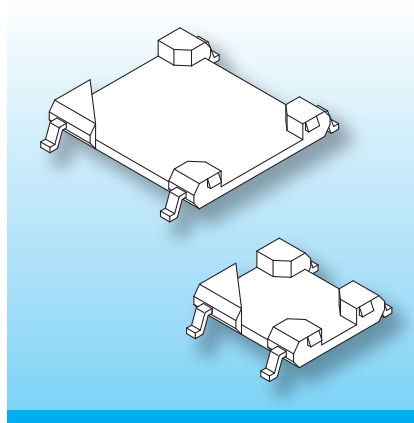


They are available in four different sizes. “Gull-wing” type SMD terminals are fitted at the corners. To prevent melt-out, these should ideally be mechanically fixed when soldering on the wires. To facilitate automatic board assembly, Pick and Place Caps are available for the whole range.

Type	Order-Code	Accessories
Carrier: GP-SMD1/12/4f-625-/torA504	94 1 5 2 - 1 3 2	Pick and Place Cap P-GP 12-5.4
Solder-pin: fm625-40/ub	7 5 8 0 3 - 2 1 3	Pick and Place Cap P-GP 12-7.4
		Pick and Place Cap P-GP 12-9.4

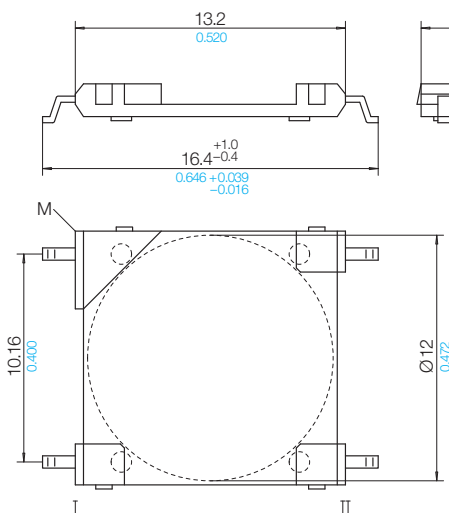

Pin Connecting Surface View pin-side

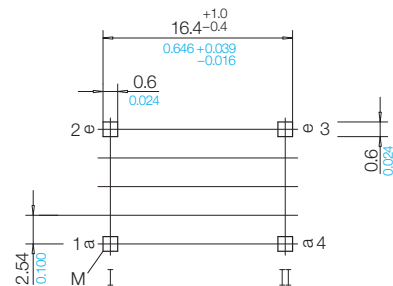

Stand 08/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com