



EFD-SMD Coilformers (fu)

The coilformers are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering.
Pin material: tin bronze, tinned.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

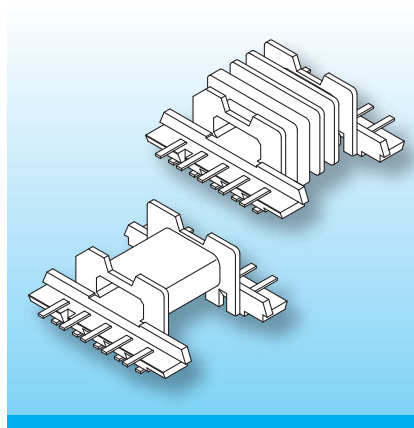


The coilformers are fitted with U-shaped terminals. The two sides of the terminal allow automatic binding-on and soldering of the wires, leaving the pcb-side of the terminal free from tin.
Automatic placing of the coilformer and the ferrites is possible by using a Snap-on Cap. This cap is spring-loaded and keeps the ferrites and coilformer together. The coilformers are available with single, double and four sections.

Type	Order-Code	Accessories
Coilformer: EFD 15-SMD2/1k/8f-625-/torA504	94302-132	Snap-on Cap EFD 15/FG
Coilformer: EFD 15-SMD2/2k/8f-625-/torA504	N0310-132 	Spring-Clip SB-EFD 15
Coilformer: EFD 15-SMD2/1-3ks/8f-625-/torA504	N0311-132 	
Solder-pin: fu625-67/ub	75826-213	

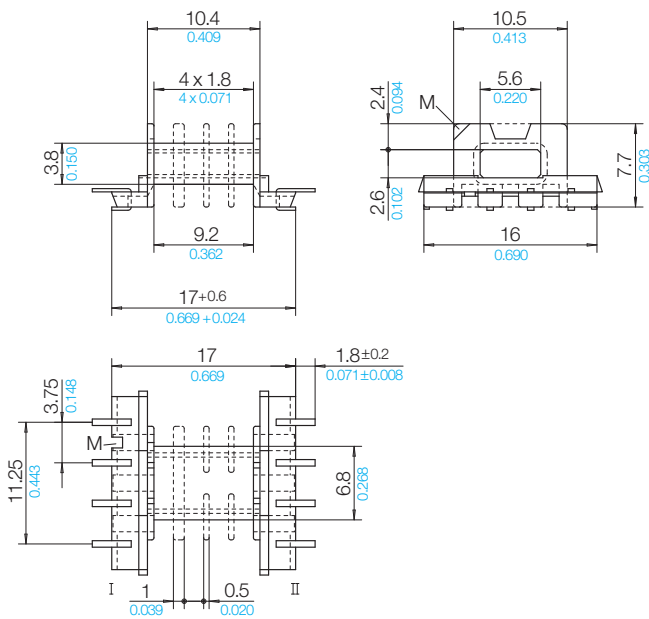

Pin Connecting Surface

View pin-side



Stand 07/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com