


TR-SMD


Surface Mount Bases (fu)

The surface-mount bases (fu) are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering. Pin material: tin bronze, tinned. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

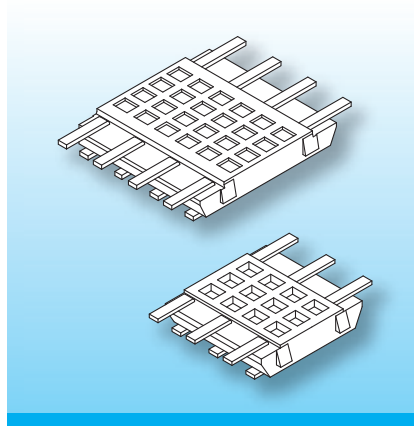


The bases are fitted with 6 to 10 U-shaped terminals. The two sides of the terminal allow automatic binding-on and soldering of the wires, leaving the pcb-side of the terminal free from tin. Surface mount bases are suitable to carry glued-on small toroidal windings or other small electronic components. This then allows automatic assembly of pcbs when fitted with Pick and Place Caps.

Type	Order-Code	Accessories
Surface mount base: TR-SMD2/6/6f-625-/torA504	9 4 3 1 1 - 1 3 2	Pick and Place Cap P-GP 6-3.4
Solder-pin: fu625-67/ub	7 5 8 2 6 - 2 1 3	Pick and Place Cap P-GP 6-5.4
		Pick and Place Cap P-GP 6-7.4

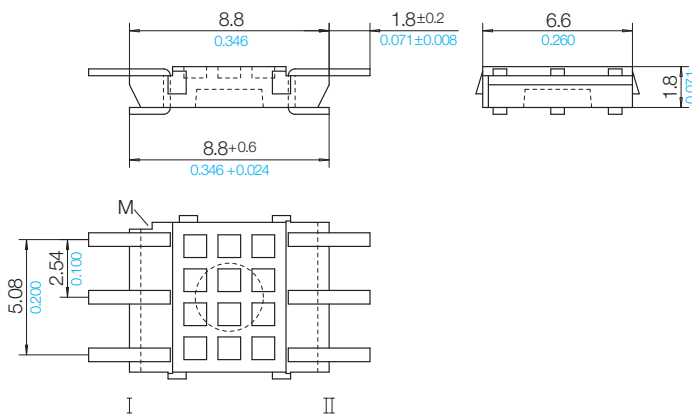

Pin Connecting Surface View pin-side



Stand 08/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/*inch*

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com