


## P-EE Pick and Place Caps

The Pick and Place Caps are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch).

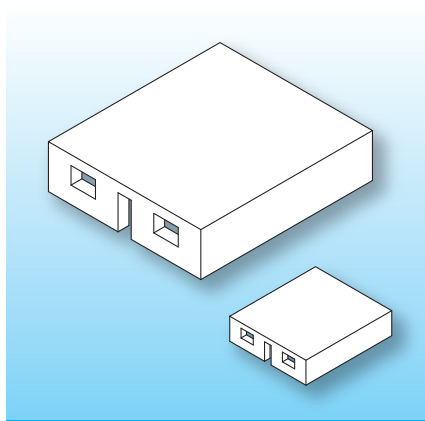


The Pick and Place Caps for the range EE 5 – EE 16 allow automatic board assembly. They are designed to fit the top of the flanges of the SMD coilformers via a snap-on facility.

When ordering please quote type and order-code.

| Type              | Order-Code |                                                                                                | A            | B            | C           | I           |
|-------------------|------------|------------------------------------------------------------------------------------------------|--------------|--------------|-------------|-------------|
| P-EE 5/torA504*   | 67020-132  |                                                                                                | 4.7 / 0.185  | 4.7 / 0.185  | 1.5 / 0.059 | 0.5 / 0.020 |
| P-EE 8/torA504    | 67021-132  |                                                                                                | 6.5 / 0.256  | 6.7 / 0.264  | 2.0 / 0.079 | 0.5 / 0.020 |
| P-EE 8.8/torA504  | 67024-132  |                                                                                                | 5.1 / 0.201  | 5.8 / 0.228  | 1.5 / 0.059 | 0.5 / 0.020 |
| P-EE 10/torA504   | 67022-132  |                                                                                                | 7.9 / 0.311  | 8.1 / 0.319  | 2.3 / 0.091 | 0.5 / 0.020 |
| P-EE 12.6/torA504 | 67023-132  |                                                                                                | 9.7 / 0.382  | 9.9 / 0.390  | 2.8 / 0.110 | 0.5 / 0.020 |
| P-EE 16/torA504   | 67025-132  |                                                                                                | 12.0 / 0.472 | 12.3 / 0.484 | 3.0 / 0.118 | 0.5 / 0.020 |
| P-EE 20/torA504   | N0527-132  |  on request | 15.0 / 0.591 | 15.3 / 0.602 | 3.0 / 0.118 | 0.6 / 0.024 |

\* P-EE 5 suitable for coilformer EE 6.3

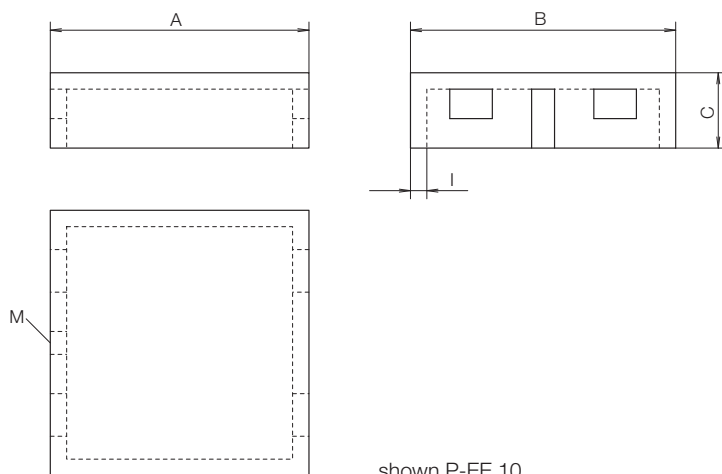

Stand 03/2014 | © 2026 NORWE ONE GmbH

Warranties:  
refer to Terms and Conditions of Sale

### NORWE ONE GmbH

Postfach 13 56  
51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

### NORWE Inc.

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail usa@norwe.com  
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail verkauf@norwe.de  
Internet www.norwe.de  
www.norwe.eu