EFD – Coilformers with z6 Solder-pins

The coilformers are made in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature +155° C).
Pin material: tin bronze, tinned.
Maximum solder temperature 350° C, 2 sec.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

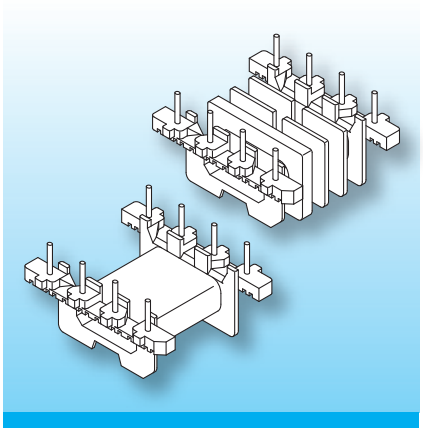

The coilformers are fitted with straight z6 pins. Binding-on of the wires is axially.The use of thin wires allows very short soldering times. The terminal strips usually feature “noses” which provide tension-relief, and “stand-offs” which allow clean soldering of the wires and of the coilformer onto the pcb.

Type	Order-Code	Accessories
Coilformer: EFD 20/1k/8-6/2.5/rtg	94322-087	Clip SB-EFD 20
Coilformer: EFD 20/1-3ks/8-6/2.5/rtg	N0181-087 on request	
Solder-pin: z606/ua	73262-212	
Solder-pin: z607/ua	73263-212	

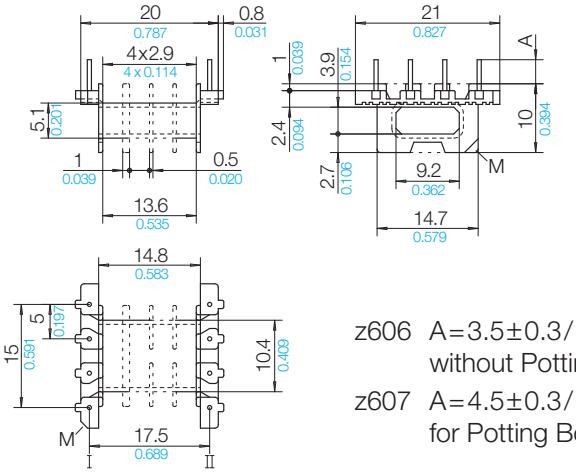

z606 A=3.5±0.3/0.138±0.012
without Potting Box
z607 A=4.5±0.3/0.177±0.012
for Potting Box

Grid
View pin-side



© 01/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.
P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com