



EFD – Coilformers with z6 Solder-pins

The coilformers are made in gfr Polyethylene Terephthalate PET of type rtg nat. (RTI long-range temperature +155°C).
Pin material: tin bronze, tinned.
Maximum solder temperature 350°C, 2 sec.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

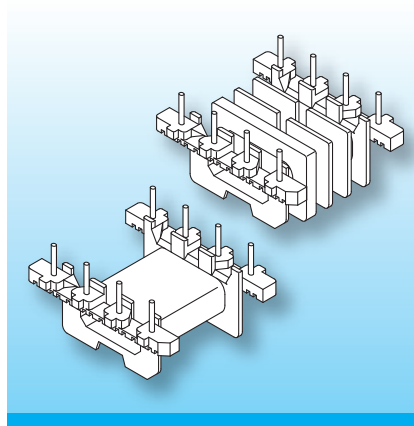


The coilformers are fitted with straight z6 pins. Binding-on of the wires is axially. The use of thin wires allows very short soldering times. The terminal strips usually feature “noses” which provide tension-relief, and “stand-offs” which allow clean soldering of the wires and of the coilformer onto the pcb.

Type	Order-Code	Accessories
Coilformer: EFD 25/1k/10-6/2.5/rtg	94324-087	on request
Coilformer: EFD 25/1-3ks/10-6/2.5/rtg	94328-087	
Solder-pin: z606/ua	73262-212	
Solder-pin: z607/ua	73263-212	

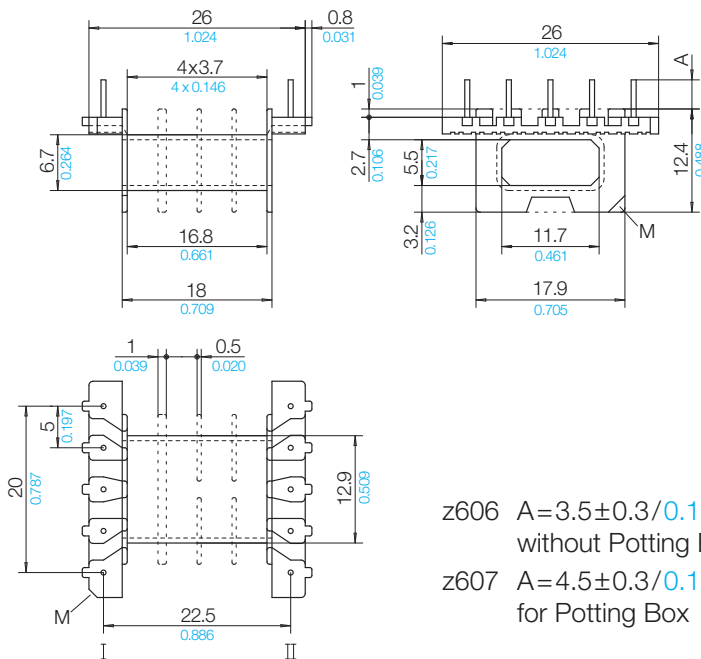

Grid
View pin-side



z606 $A=3.5\pm0.3/0.138\pm0.012$
without Potting Box
z607 $A=4.5\pm0.3/0.177\pm0.012$
for Potting Box

Stand 01/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/*inch*

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com