



EFD – Coilformers with z8 Solder-pins

The coilformers are made in gfr Polyamide PA66 of type A3X2G10 (RTI long-range temperature +115°C).
Pin material: tin bronze, tinned.
Maximum solder temperature 350°C, 2 sec.
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

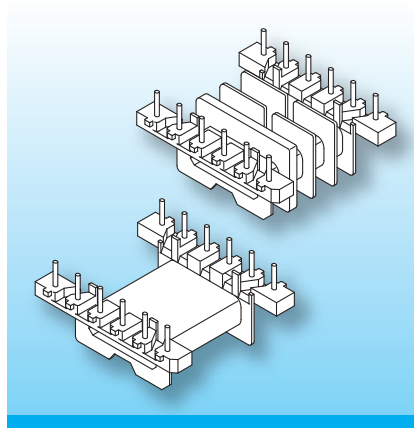

The coilformers are fitted with straight, sturdy z8 pins. Binding-on of the wires is axially. The pins are suitable for windings with thick wire. The terminal strips usually feature “noses” which provide tension-relief, and “stand-offs” which allow clean soldering of the wires and of the coilformer onto the pcb.

Type	Order-Code	Accessories
Coilformer: EFD 15/1k/8-8/3.75/A3X2G10	N0183-181 on request	Clip SB-EFD 15
Coilformer: EFD 15/1-3ks/8-8/3.75/A3X2G10	N0184-181 on request	
Solder-pin: z808/ua	73294-212	
Solder-pin: z809/ua	73295-212	

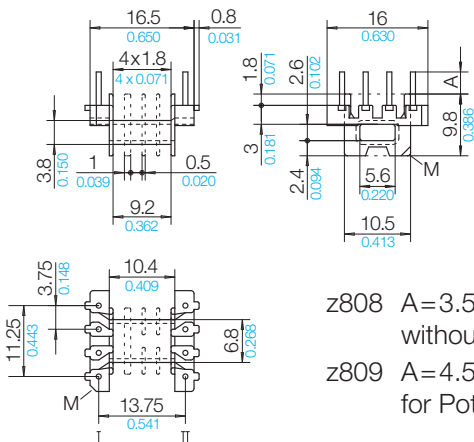

z808 $A=3.5\pm0.3/0.138\pm0.012$
without Potting Box
z809 $A=4.5\pm0.3/0.177\pm0.012$
for Potting Box

Grid

View pin-side

