


Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

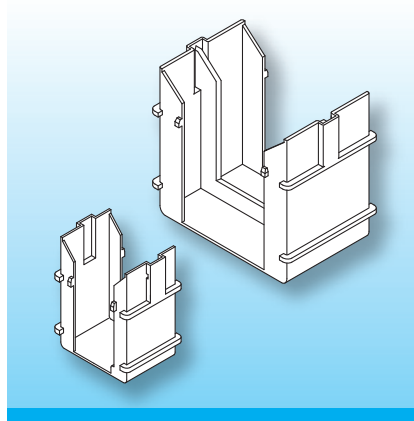


The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type I	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 30-5/1v/p6g	20017-024	19.6	19.0	12.1	5.3	4.4	22.0	14.4	13.4	–	16.8
EJ 30-10/1v/p6g	20037-024	19.6	24.5	12.1	10.8	4.4	22.0	14.4	13.4	–	16.8
EJ 30-12/1v/p6g	20057-024	19.6	26.5	12.1	12.8	4.4	22.0	14.4	13.4	–	16.8
EJ 30-15/1v/p6g	20077-024	19.6	29.5	12.1	15.8	4.4	22.0	14.4	13.4	–	16.8
EJ 30-18/1v/p6g	20097-024	19.6	32.0	12.1	18.3	4.4	22.0	14.4	13.4	–	16.8
EJ 38-7/1v/p6g	20117-024	25.2	23.0	15.2	7.7	5.9	27.6	19.0	18.0	–	21.4

Type I

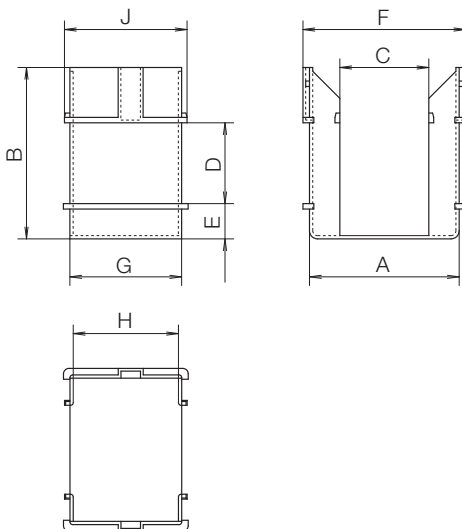

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

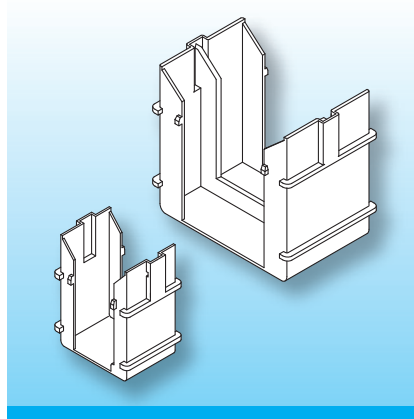


The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type I	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 38-13/1v/p6g	20137-024	25.2	29.1	15.2	13.8	5.9	27.6	19.0	18.0	–	21.4
		0.992	1.146	0.598	0.543	0.232	1.087	0.748	0.709		0.843
EJ 38-16/1v/p6g	20157-024	25.2	31.8	15.2	16.5	5.9	27.6	19.0	18.0	–	21.4
		0.992	1.252	0.598	0.650	0.232	1.087	0.748	0.709		0.843
EJ 42-8/1v/p6g	20217-024	27.6	25.3	16.4	8.7	6.5	30.0	20.6	19.4	–	23.0
		1.087	0.996	0.646	0.343	0.256	1.181	0.811	0.764		0.906
EJ 42-14/1v/p6g	20237-024	27.6	31.6	16.4	15.0	6.5	30.0	20.6	19.4	–	23.0
		1.087	1.244	0.646	0.591	0.256	1.181	0.811	0.764		0.906
EJ 48-16/1v/p6g	20317-024	31.6	35.8	20.2	17.0	7.5	34.0	23.6	22.2	–	26.0
		1.244	1.409	0.795	0.669	0.295	1.339	0.929	0.874		1.024
EJ 48-20/1v/p6g	20337-024	31.6	39.5	20.2	20.7	7.5	34.0	23.6	22.2	–	26.0
		1.244	1.555	0.795	0.815	0.295	1.339	0.929	0.874		1.024

Type I

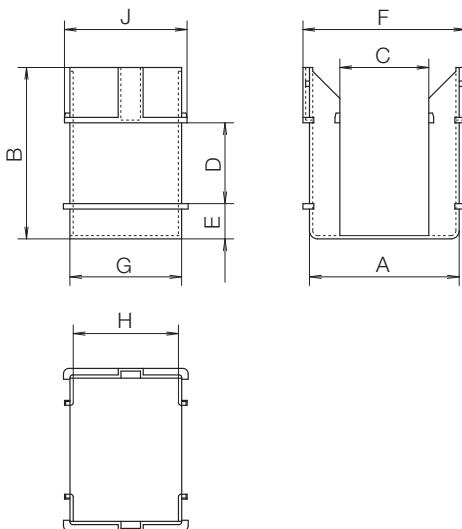

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

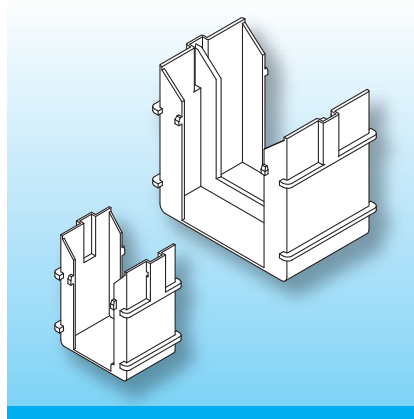


The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type I	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 54-18/1v/p6g	20417-024	35.6 1.402	40.0 1.575	24.0 0.945	19.0 0.748	8.5 0.335	38.0 1.496	26.6 1.047	25.0 0.984	–	29.0 1.142
EJ 60-21/1v/p6g	20517-024	39.6 1.559	44.3 1.744	28.0 1.102	21.2 0.835	9.5 0.374	42.0 1.654	29.6 1.165	28.0 1.102	–	32.0 1.260
EJ 60-25/1v/p6g	20537-024	39.6 1.559	48.8 1.921	28.0 1.102	25.7 1.012	9.5 0.374	42.0 1.654	29.6 1.165	28.0 1.102	–	32.0 1.260
EJ 60-30/1v/p6g	20557-024	39.6 1.559	53.8 2.118	28.0 1.102	30.7 1.209	9.5 0.374	42.0 1.654	29.6 1.165	28.0 1.102	–	32.0 1.260
EJ 66-23/1v/p6g	N0263-024	43.8 1.724	47.8 1.882	32.2 1.268	23.2 0.913	10.3 0.406	46.2 1.819	31.1 1.224	29.5 1.161	–	33.5 1.319

 on request

Type I

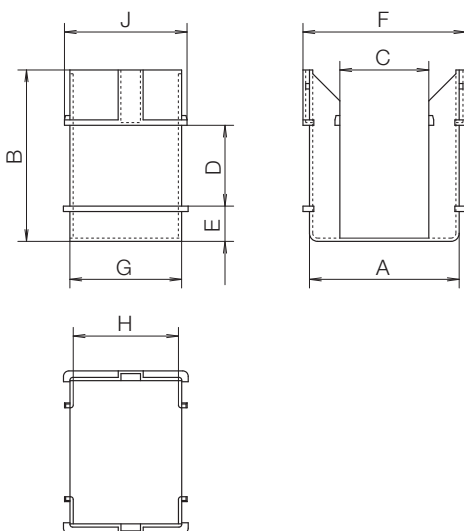

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

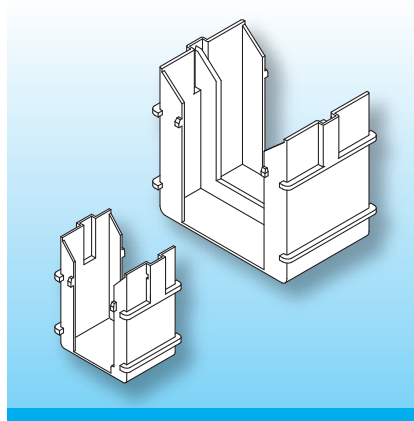


The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type II	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 30-5/6-4v/p6g	20015-024	19.6	19.0	12.1	5.3	4.4	22.0	14.4	7.6	5.8	16.8
EJ 30-10/6-4v/p6g	20035-024	0.772	0.748	0.476	0.209	0.173	0.866	0.567	0.299	0.228	0.661
EJ 30-12/6-4v/p6g	20055-024	19.6	24.5	12.1	10.8	4.4	22.0	14.4	7.6	5.8	16.8
EJ 30-12N/6-4v/p6g	21055-024	0.772	0.965	0.476	0.425	0.173	0.866	0.567	0.299	0.228	0.661
EJ 30-15/6-4v/p6g	20075-024	19.6	26.5	12.1	12.8	4.4	22.0	14.4	7.6	5.8	16.8
EJ 30-18/6-4v/p6g	20095-024	0.772	1.043	0.476	0.504	0.173	0.866	0.567	0.299	0.228	0.661
		19.6	24.5	12.1	23.2	4.4	22.0	14.4	7.6	5.8	16.8
		0.772	0.965	0.476	0.913	0.173	0.866	0.567	0.299	0.228	0.661
		19.6	29.5	12.1	15.8	4.4	22.0	14.4	7.6	5.8	16.8
		0.772	1.161	0.476	0.622	0.173	0.866	0.567	0.299	0.228	0.661
		19.6	32.0	12.1	18.3	4.4	22.0	14.4	7.6	5.8	16.8
		0.772	1.260	0.476	0.720	0.173	0.866	0.567	0.299	0.228	0.661

Type II

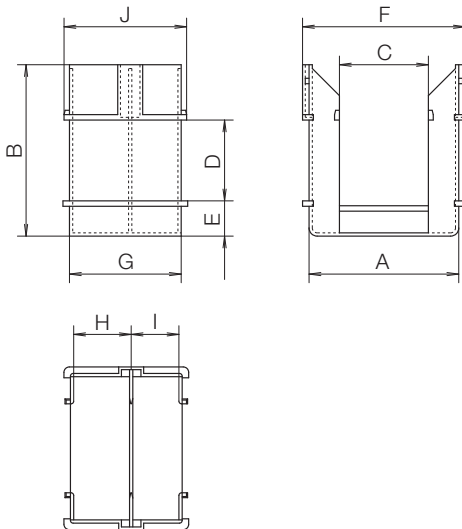

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

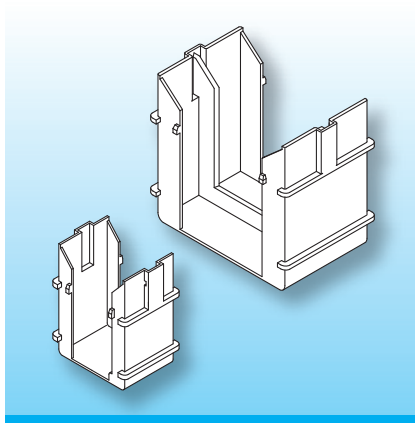


The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type II	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 38-7/9-6v/p6g	20115-024	25.2	23.0	15.2	7.7	5.9	27.6	19.0	10.5	7.5	21.4
EJ 38-13/9-6v/p6g	20135-024	0.992	0.906	0.598	0.303	0.232	1.087	0.748	0.413	0.295	0.843
EJ 38-16/9-6v/p6g	20155-024	25.2	29.1	15.2	13.8	5.9	27.6	19.0	10.5	7.5	21.4
EJ 42-8/9-7v/p6g	20215-024	0.992	1.146	0.598	0.543	0.232	1.087	0.748	0.413	0.295	0.843
EJ 42-14/9-7v/p6g	20235-024	25.2	31.8	15.2	16.5	5.9	27.6	19.0	10.5	7.5	21.4
EJ 48-16/10-9v/p6g	20315-024	0.992	1.252	0.598	0.650	0.232	1.087	0.748	0.413	0.295	0.843
		27.6	25.3	16.4	8.7	6.5	30.0	20.6	10.6	8.8	23.0
		1.087	0.996	0.646	0.343	0.256	1.181	0.811	0.417	0.346	0.906
		27.6	31.6	16.4	15.0	6.5	30.0	20.6	10.6	8.8	23.0
		1.087	1.244	0.646	0.591	0.256	1.181	0.811	0.417	0.346	0.906
		31.6	35.8	20.2	17.0	7.5	34.0	23.6	11.6	10.6	26.0
		1.244	1.409	0.795	0.669	0.295	1.339	0.929	0.457	0.417	1.024

Type II

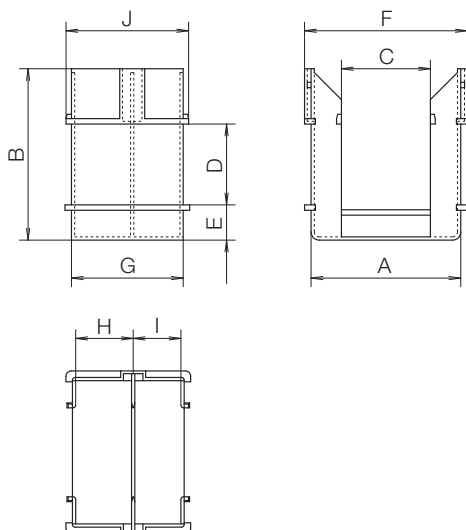

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

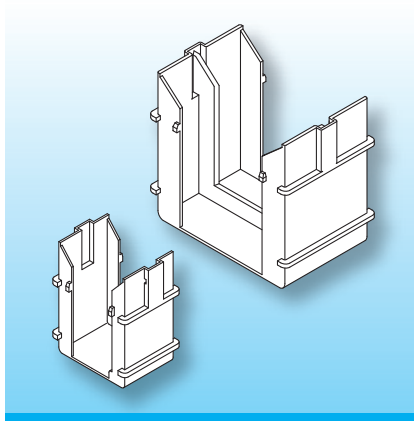


The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type II	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 48-20/10-9v/p6g	20335-024	31.6	39.5	20.2	20.7	7.5	34.0	23.6	11.6	10.6	26.0
		1.244	1.555	0.795	0.815	0.295	1.339	0.929	0.457	0.417	1.024
EJ 54-18/2v/p6g	20416-024	35.6	40.0	24.0	19.0	8.5	38.0	26.6	12.5	12.5	29.0
		1.402	1.575	0.945	0.748	0.335	1.496	1.047	0.492	0.492	1.142
EJ 60-21/2v/p6g	20516-024	39.6	44.3	28.0	21.2	9.5	42.0	29.6	14.0	14.0	32.0
		1.559	1.744	1.102	0.835	0.374	1.654	1.165	0.551	0.551	1.260
EJ 60-25/2v/p6g	20536-024	39.6	48.8	28.0	25.7	9.5	42.0	29.6	14.0	14.0	32.0
		1.559	1.921	1.102	1.012	0.374	1.654	1.165	0.551	0.551	1.260
EJ 60-30/2v/p6g	20556-024	39.6	53.8	28.0	30.7	9.5	42.0	29.6	14.0	14.0	32.0
		1.559	2.118	1.102	1.209	0.374	1.654	1.165	0.551	0.551	1.260
EJ 66-23/2v/p6g	21616-024	43.8	47.8	32.2	23.2	10.3	46.2	31.1	14.4	14.4	33.5
		1.724	1.882	1.268	0.913	0.406	1.819	1.224	0.567	0.567	1.319

Type II

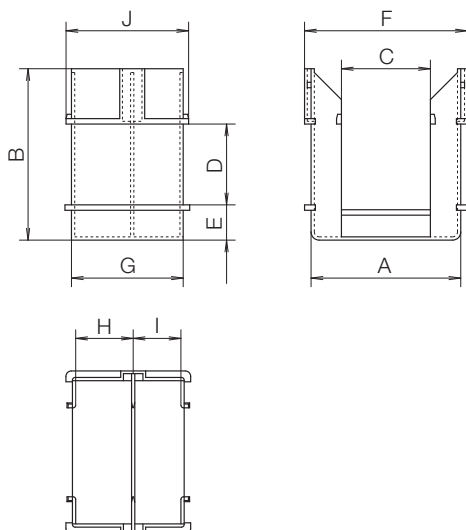

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com