Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

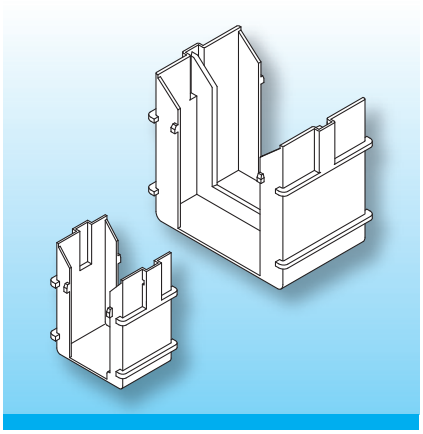

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type I	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 30-5/1v/p6g	20017-024	19.6 0.772	19.0 0.748	12.1 0.476	5.3 0.209	4.4 0.173	22.0 0.866	14.4 0.567	13.4 0.528	–	16.8 0.661
EJ 30-10/1v/p6g	20037-024	19.6 0.772	24.5 0.965	12.1 0.476	10.8 0.425	4.4 0.173	22.0 0.866	14.4 0.567	13.4 0.528	–	16.8 0.661
EJ 30-12/1v/p6g	20057-024	19.6 0.772	26.5 1.043	12.1 0.476	12.8 0.504	4.4 0.173	22.0 0.866	14.4 0.567	13.4 0.528	–	16.8 0.661
EJ 30-15/1v/p6g	20077-024	19.6 0.772	29.5 1.161	12.1 0.476	15.8 0.622	4.4 0.173	22.0 0.866	14.4 0.567	13.4 0.528	–	16.8 0.661
EJ 30-18/1v/p6g	20097-024	19.6 0.772	32.0 1.260	12.1 0.476	18.3 0.720	4.4 0.173	22.0 0.866	14.4 0.567	13.4 0.528	–	16.8 0.661
EJ 38-7/1v/p6g	20117-024	25.2 0.992	23.0 0.906	15.2 0.598	7.7 0.303	5.9 0.232	27.6 1.087	19.0 0.748	18.0 0.709	–	21.4 0.843

Type I

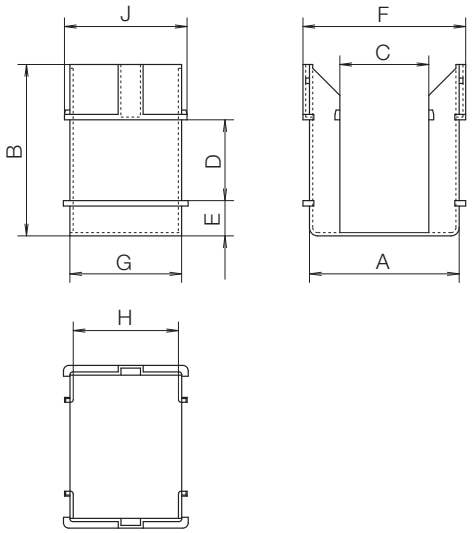

© 07/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

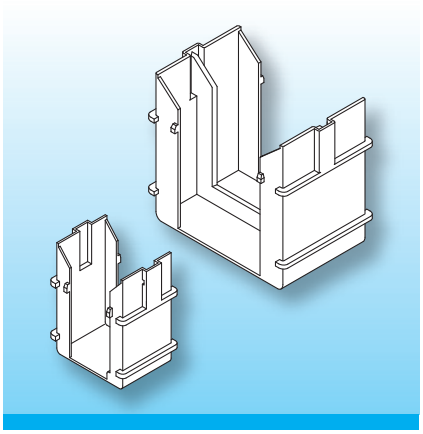

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type I	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 38-13/1v/p6g	20137-024	25.2 0.992	29.1 1.146	15.2 0.598	13.8 0.543	5.9 0.232	27.6 1.087	19.0 0.748	18.0 0.709	–	21.4 0.843
EJ 38-16/1v/p6g	20157-024	25.2 0.992	31.8 1.252	15.2 0.598	16.5 0.650	5.9 0.232	27.6 1.087	19.0 0.748	18.0 0.709	–	21.4 0.843
EJ 42-8/1v/p6g	20217-024	27.6 1.087	25.3 0.996	16.4 0.646	8.7 0.343	6.5 0.256	30.0 1.181	20.6 0.811	19.4 0.764	–	23.0 0.906
EJ 42-14/1v/p6g	20237-024	27.6 1.087	31.6 1.244	16.4 0.646	15.0 0.591	6.5 0.256	30.0 1.181	20.6 0.811	19.4 0.764	–	23.0 0.906
EJ 48-16/1v/p6g	20317-024	31.6 1.244	35.8 1.409	20.2 0.795	17.0 0.669	7.5 0.295	34.0 1.339	23.6 0.929	22.2 0.874	–	26.0 1.024
EJ 48-20/1v/p6g	20337-024	31.6 1.244	39.5 1.555	20.2 0.795	20.7 0.815	7.5 0.295	34.0 1.339	23.6 0.929	22.2 0.874	–	26.0 1.024

Type I

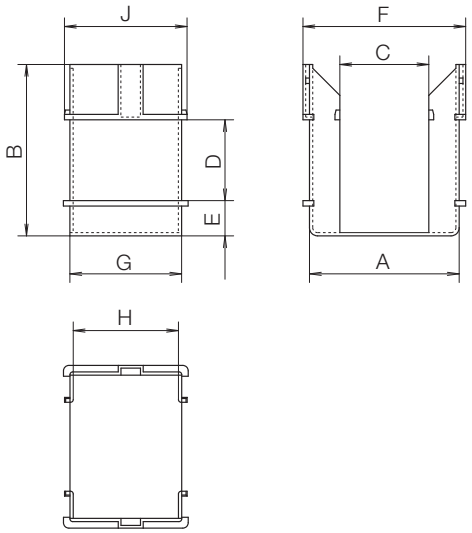

© 07/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

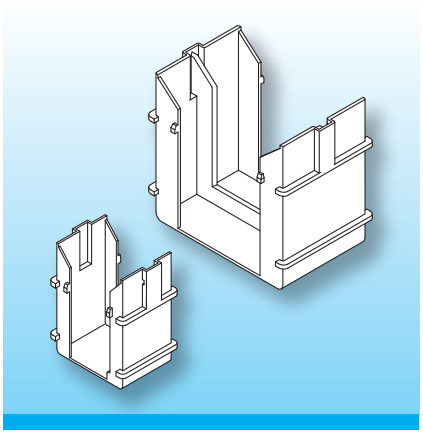

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type I	Order-Code		A	B	C	D	E	F	G	H	I	J
EJ 54-18/1v/p6g	20417-024		35.6 1.402	40.0 1.575	24.0 0.945	19.0 0.748	8.5 0.335	38.0 1.496	26.6 1.047	25.0 0.984	–	29.0 1.142
EJ 60-21/1v/p6g	20517-024		39.6 1.559	44.3 1.744	28.0 1.102	21.2 0.835	9.5 0.374	42.0 1.654	29.6 1.165	28.0 1.102	–	32.0 1.260
EJ 60-25/1v/p6g	20537-024		39.6 1.559	48.8 1.921	28.0 1.102	25.7 1.012	9.5 0.374	42.0 1.654	29.6 1.165	28.0 1.102	–	32.0 1.260
EJ 60-30/1v/p6g	20557-024		39.6 1.559	53.8 2.118	28.0 1.102	30.7 1.209	9.5 0.374	42.0 1.654	29.6 1.165	28.0 1.102	–	32.0 1.260
EJ 66-23/1v/p6g	N0263-024	on request	43.8 1.724	47.8 1.882	32.2 1.268	23.2 0.913	10.3 0.406	46.2 1.819	31.1 1.224	29.5 1.161	–	33.5 1.319

Type I

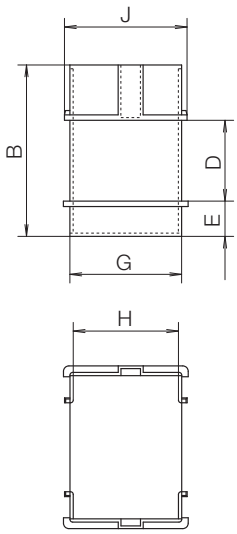



© 07/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

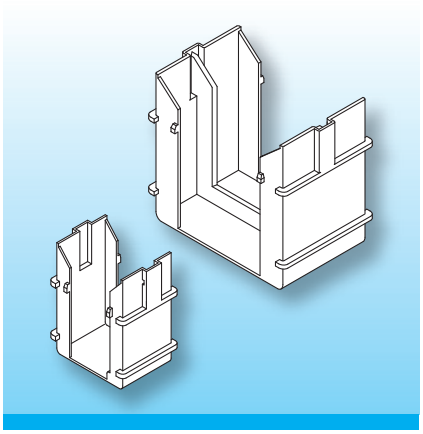

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type II	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 30-5/6-4v/p6g	20015-024	19.6 0.772	19.0 0.748	12.1 0.476	5.3 0.209	4.4 0.173	22.0 0.866	14.4 0.567	7.6 0.299	5.8 0.228	16.8 0.661
EJ 30-10/6-4v/p6g	20035-024	19.6 0.772	24.5 0.965	12.1 0.476	10.8 0.425	4.4 0.173	22.0 0.866	14.4 0.567	7.6 0.299	5.8 0.228	16.8 0.661
EJ 30-12/6-4v/p6g	20055-024	19.6 0.772	26.5 1.043	12.1 0.476	12.8 0.504	4.4 0.173	22.0 0.866	14.4 0.567	7.6 0.299	5.8 0.228	16.8 0.661
EJ 30-12N/6-4v/p6g	21055-024	19.6 0.772	24.5 0.965	12.1 0.476	23.2 0.913	4.4 0.173	22.0 0.866	14.4 0.567	7.6 0.299	5.8 0.228	16.8 0.661
EJ 30-15/6-4v/p6g	20075-024	19.6 0.772	29.5 1.161	12.1 0.476	15.8 0.622	4.4 0.173	22.0 0.866	14.4 0.567	7.6 0.299	5.8 0.228	16.8 0.661
EJ 30-18/6-4v/p6g	20095-024	19.6 0.772	32.0 1.260	12.1 0.476	18.3 0.720	4.4 0.173	22.0 0.866	14.4 0.567	7.6 0.299	5.8 0.228	16.8 0.661

Type II

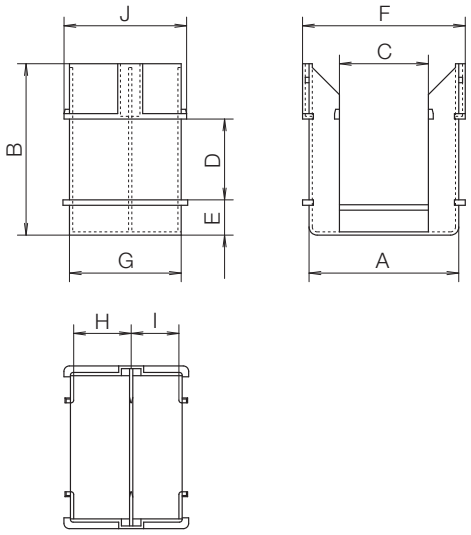

© 07/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

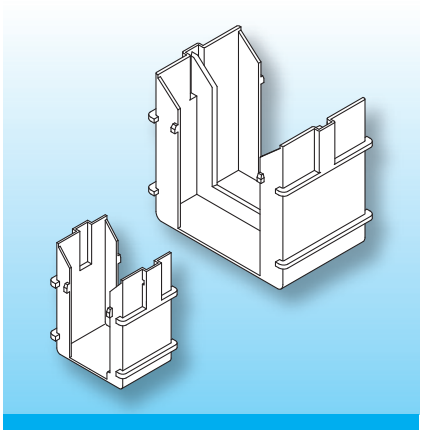

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type II	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 38-7/9-6v/p6g	20115-024	25.2 0.992	23.0 0.906	15.2 0.598	7.7 0.303	5.9 0.232	27.6 1.087	19.0 0.748	10.5 0.413	7.5 0.295	21.4 0.843
EJ 38-13/9-6v/p6g	20135-024	25.2 0.992	29.1 1.146	15.2 0.598	13.8 0.543	5.9 0.232	27.6 1.087	19.0 0.748	10.5 0.413	7.5 0.295	21.4 0.843
EJ 38-16/9-6v/p6g	20155-024	25.2 0.992	31.8 1.252	15.2 0.598	16.5 0.650	5.9 0.232	27.6 1.087	19.0 0.748	10.5 0.413	7.5 0.295	21.4 0.843
EJ 42-8/9-7v/p6g	20215-024	27.6 1.087	25.3 0.996	16.4 0.646	8.7 0.343	6.5 0.256	30.0 1.181	20.6 0.811	10.6 0.417	8.8 0.346	23.0 0.906
EJ 42-14/9-7v/p6g	20235-024	27.6 1.087	31.6 1.244	16.4 0.646	15.0 0.591	6.5 0.256	30.0 1.181	20.6 0.811	10.6 0.417	8.8 0.346	23.0 0.906
EJ 48-16/10-9v/p6g	20315-024	31.6 1.244	35.8 1.409	20.2 0.795	17.0 0.669	7.5 0.295	34.0 1.339	23.6 0.929	11.6 0.457	10.6 0.417	26.0 1.024

Type II

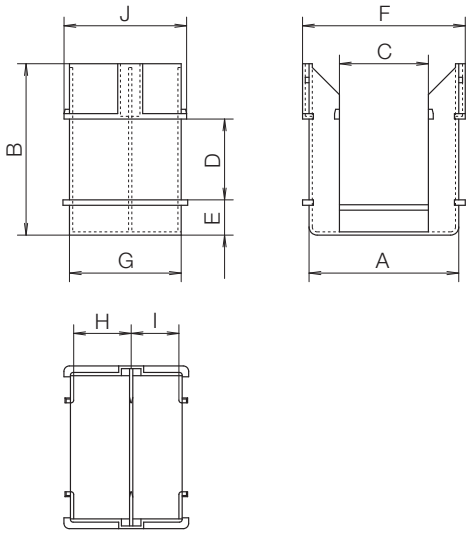

© 07/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

Shrouds for UNI EJ Coilformers

The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

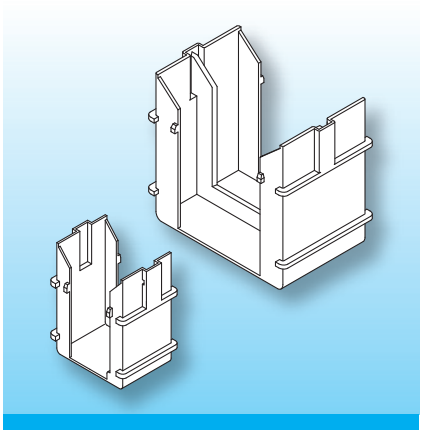

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations. Please note that double section UNI EJ coilformers with a compartment for a thermofuse require an additional insulating bridge to achieve safety insulation.

When ordering please quote type and order-code.

Type II	Order-Code	A	B	C	D	E	F	G	H	I	J
EJ 48-20/10-9v/p6g	20335-024	31.6 1.244	39.5 1.555	20.2 0.795	20.7 0.815	7.5 0.295	34.0 1.339	23.6 0.929	11.6 0.457	10.6 0.417	26.0 1.024
EJ 54-18/2v/p6g	20416-024	35.6 1.402	40.0 1.575	24.0 0.945	19.0 0.748	8.5 0.335	38.0 1.496	26.6 1.047	12.5 0.492	12.5 0.492	29.0 1.142
EJ 60-21/2v/p6g	20516-024	39.6 1.559	44.3 1.744	28.0 1.102	21.2 0.835	9.5 0.374	42.0 1.654	29.6 1.165	14.0 0.551	14.0 0.551	32.0 1.260
EJ 60-25/2v/p6g	20536-024	39.6 1.559	48.8 1.921	28.0 1.102	25.7 1.012	9.5 0.374	42.0 1.654	29.6 1.165	14.0 0.551	14.0 0.551	32.0 1.260
EJ 60-30/2v/p6g	20556-024	39.6 1.559	53.8 2.118	28.0 1.102	30.7 1.209	9.5 0.374	42.0 1.654	29.6 1.165	14.0 0.551	14.0 0.551	32.0 1.260
EJ 66-23/2v/p6g	21616-024	43.8 1.724	47.8 1.882	32.2 1.268	23.2 0.913	10.3 0.406	46.2 1.819	31.1 1.224	14.4 0.567	14.4 0.567	33.5 1.319

Type II

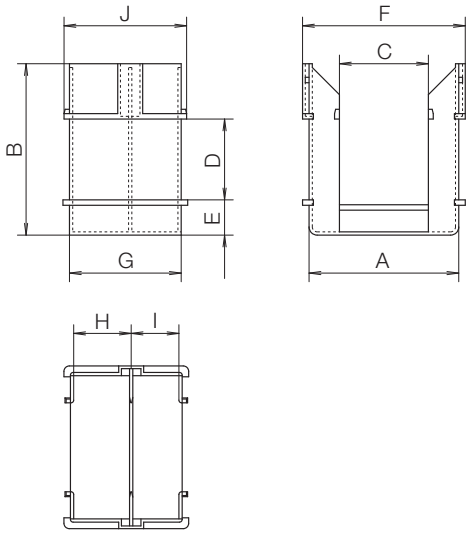

© 07/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Valid version of data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com