


## UNI EJ Coilformers


The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C) Pin material is tin bronze, tinned for solder-pins and brass, tinned for solder-tags. Max. solder temperature +350°C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

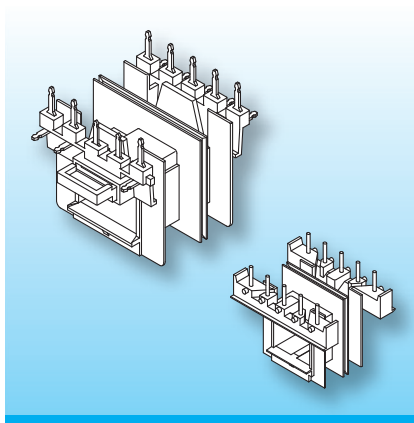

The coilformers are fitted with solder-pins and solder-tags. By fitting shrouds and insulating bridges creepage- and clearance distances of 11 mm/*0.433 inch* are achieved between primary and secondary, and 6 mm/*0.236 inch* to the core.


Elaborate description of the designs with the different implementations, see at catalogue.

| Type                                       | Order-Code | Accessories             |
|--------------------------------------------|------------|-------------------------|
| Coilformer: EJ 38-16/9z-6s/2g2-/5.0-ik/p6g | 20146-024  | Shroud EJ 38-16/9-6v    |
| Solder-tag: s14/wd                         | 75508-261  | Insulating Bridge EJ 38 |
| Solder-tag: s11/wc                         | 75315-259  | Thermoclip (on request) |

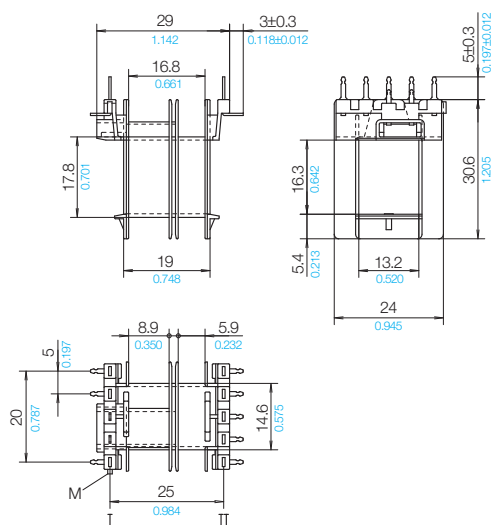

## Grid

View tag-side



Stand 06/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:  
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

**NORWE ONE GmbH**

Postfach 13 56  
51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

**NORWE Inc.**

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)