


Shrouds for UNI EE Coilformers


The shrouds are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*. The shrouds are easily fitted and latch into the coilformer, giving a cost-effective method of safety insulation.

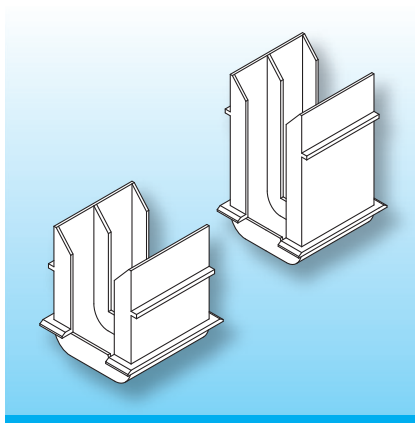

The reinforcement ribs on the shrouds act as a guide when laminating and also secure the top and bottom sets of laminations.

When ordering please quote type and order-code.

Type	Order-Code	A	B	C	D	E	F	G	H	I	J
EE 25-8/2v/p6g	22115-024	17.0	19.8	9.6	8.0	4.4	19.4	17.2	8.1	8.1	20.0
		0.669	0.780	0.378	0.315	0.173	0.764	0.677	0.319	0.319	0.787
EE 25-11/2v/p6g	22135-024	17.0	23.5	9.6	11.7	4.4	19.4	17.2	8.1	8.1	20.0
		0.669	0.925	0.378	0.461	0.173	0.764	0.677	0.319	0.319	0.787

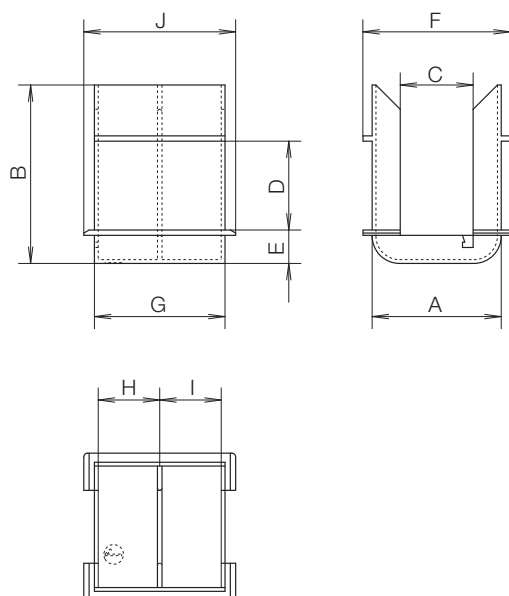

Stand 07/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com