


EI, UI Coilformers


The coilformers are made in Poly-amide PA66 gfr, UL 94 HB, temperature for longterm use at +130°C. The material used is tin bronze, tinned (solder-pins) or brass, tinned (solder-tags). Maximum solder temperature 350°C, 2 sec. (Special materials and designs on request, dimensions in mm/[inch](#)).

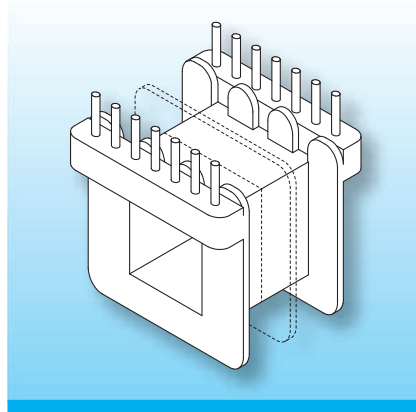

Due to their designs with different connection systems (press-fit pins, bent over pins, soldertags, etc.) the coilformer-versions allow radial as well as axial binding on of the wires, matching your individual fields of application.


We are about to draw up a catalogue of this extensive series step by step – you will find the latest survey of available components on our homepage. For special designs and dimensions as well as available accessories please contact our technical specialists.

Type	Order-Code	Accessories
Coilformer: EJ 30-12/1k/1-8/2.5-gh/p6g	04660-024	Potting Box EJ 30/vlc
Coilformer: EJ 30-12/2k/1-8/2.5-gh/p6g	N0465-024 	
Coilformer: EJ 30-12/7-5k/1-8/2.5-gh/p6g	04665-024	
Solder-pin: z810/ua	73296-212	

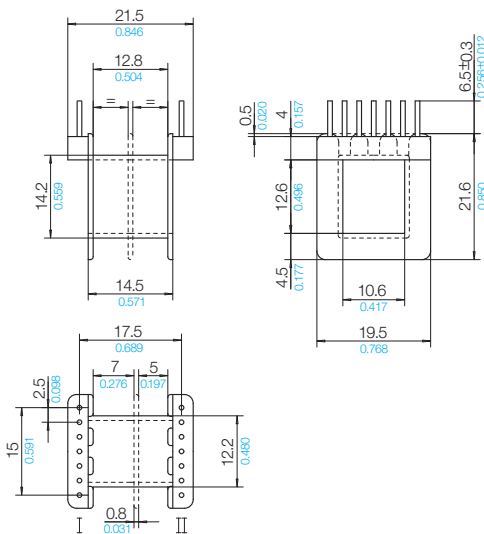

Grid

View pin-side



Stand 12/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com