


EI, UI Coilformers



The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125 °C). Pin material is tin bronze, tinned and tag material is brass, tinned. Maximum solder temperature 350 °C, 2 sec. (Special materials and designs on request, dimensions in mm/[inch](#)).

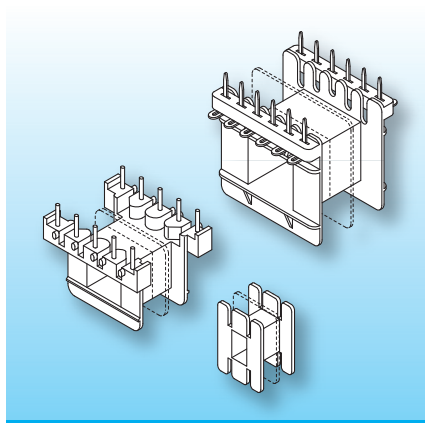

Due to their designs with different connection systems (press-fit pins, bent over pins, solder tags, etc.) the coilformer-versions allow radial as well as axial binding on of the wires, matching your individual fields of application.


We are about to draw up a catalogue of this extensive series step by step – you will find the latest survey of available components on our homepage. For special designs and dimensions as well as available accessories please contact our technical specialists.

Type	Order-Code	Accessories
Coilformer: EJ 54/1k/2-8/5.0-mn/p6g	06040-024	Potting Box EJ 54/vlc
Coilformer: EJ 54/2k/2-8/5.0-mn/p6g	06041-024	
Solder-pin: h813/ua	73499-212	
Solder-pin: z810/ua	73296-212	

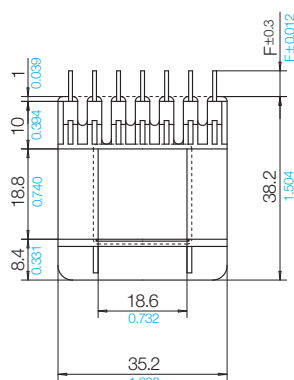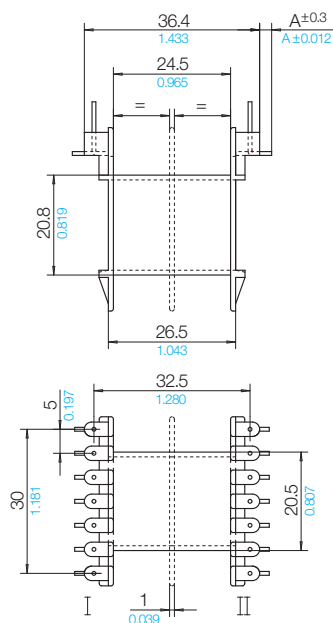

Grid

View pin-side



h813 F = 4.0 ± 0.3 / 0.157 ± 0.012 A = 1.8 ± 0.3 / 0.071 ± 0.012
z810 F = 5.0 ± 0.3 / 0.197 ± 0.012

Stand 07/2016 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version