


## EI, UI Coilformers


The coilformers are made in Polyamide PA66 gfr, UL 94 HB, temperature for longterm use at +130 °C. The material used is tin bronze, tinned (solder-pins) or brass, tinned (solder-tags). Maximum solder temperature 350 °C, 2 sec. (Special materials and designs on request, dimensions in mm/*inch*).

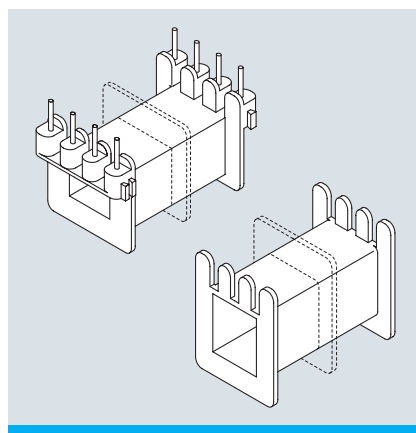

Due to their designs with different connection systems (press-fit pins, bent over pins, soldertags, etc.) the coilformer-versions allow radial as well as axial binding on of the wires, matching your individual fields of application.

We are about to draw up a catalogue of this extensive series step by step – you will find the latest survey of available components on our homepage. For special designs and dimensions as well as available accessories please contact our technical specialists.

| Type                                   | Order-Code | Accessories |
|----------------------------------------|------------|-------------|
| Coilformer: 2UJ 30a/1k/1g2-/5.0-gn/p6g | 08700-024  | on request  |
| Coilformer: 2UJ 30a/2k/1g2-/5.0-gn/p6g | 08701-024  |             |
| Solder-tag: g2s/wd                     | 71040-261  |             |

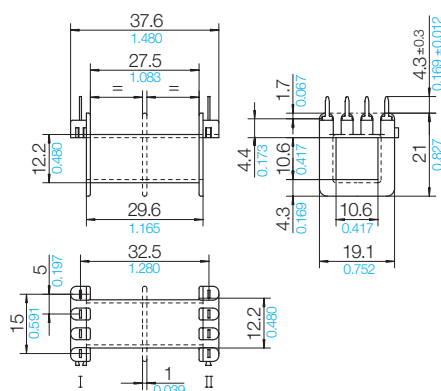

## Grid

View tag-side

