


DIL-Sockets with Stand-offs

The sockets are made in gfr Poly-butylene Terephthalate PBT of type pcg (RTI long-range temperature 130°C). Solder-tag material is brass tinned and solder-pin material is tin bronze, tinned.


Maximum solder temperature 350°C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

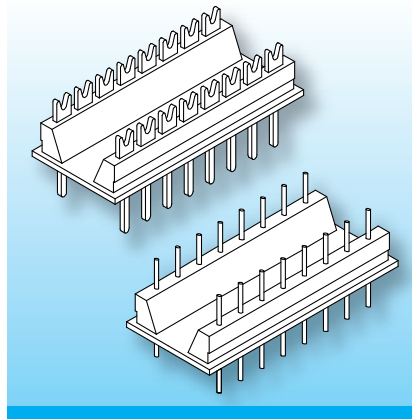


DIL-Sockets (Dual-In-Line) are suitable for complex circuits such as logic circuits, resistor networks or diode matrix. The sockets feature “stand-offs” which allow clean soldering of the wires and of the sockets onto the pcb. A suitable DIL-Box is available.

Type	Order-Code	Accessories
Socket: U 14/-6/pcg	65131-047	DIL-Box D14-7
Solder-pin: m610/ua	70118-212	DIL-Box D14-10

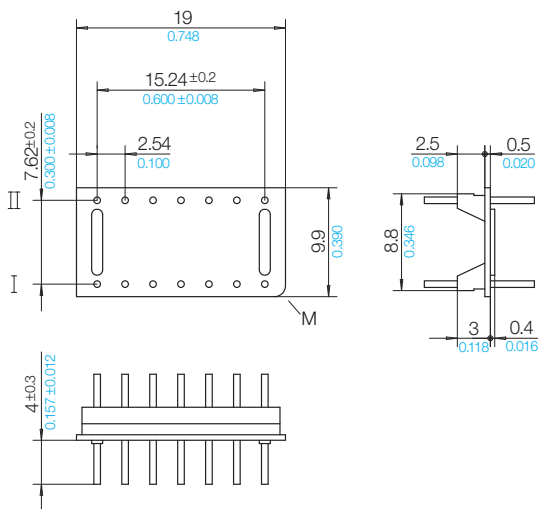

Grid

View pin-side



Stand 08/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/*inch*

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com