



Boxes, Specials

The boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125 °C) and gfr Polybutylene Terephthalate PBT of type pcg (RTI long-range temperature +130 °C).
Special materials and designs on request, dimensions in mm/*inch*.

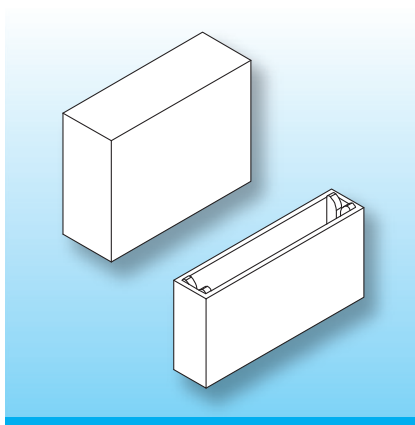

The potting boxes can be used to your individual requirements. In particular they are suitable for potting electrical components such as circuits on pcbs.

Type	Order-Code	A	B	C	D	E	F	G	I
Geh. 11.8/4.3/10.4/p6g	93493-024	5.5 0.217	13.0 0.512	11.0 0.433	– –	11.8 0.465	4.3 0.169	– –	0.6 0.024
Mgh. 17.0/13.4/7.3/p6g	93484-024	15.0 0.591	20.0 0.787	8.1 0.319	– –	19.0 0.748	13.4 0.528	– –	0.8 0.031
Geh. 24.0/8.8/9.9/p6g	93463-024	10.0 0.394	25.2 0.992	10.5 0.413	– –	24.0 0.945	8.8 0.346	– –	0.6 0.024
Kgh. 25.2/10.0/9.7/p6g	93236-024	11.0 0.433	26.2 1.031	10.2 0.402	– –	25.2 0.992	10.0 0.394	– –	0.5 0.020
MO 270-60-150/p6g	65420-024	6.0 0.236	27.0 1.063	15.0 0.591	– –	26.0 1.024	4.8 0.189	24.0 0.945	0.6 0.024
MO 295-60-150/p6g	65415-024	6.0 0.236	29.5 1.161	14.5 0.571	15.0 0.591	28.0 1.102	4.4 0.173	26.0 1.024	0.8 0.031
Geh. 33.1/8.8/9.2/p6g	93465-024	10.0 0.394	34.3 1.350	9.8 0.386	– –	33.1 1.303	8.8 0.346	– –	0.6 0.024
Geh. 33.1/13.1/13.0/p6g	93415-024	14.5 0.571	34.5 1.358	13.7 0.539	– –	33.1 1.303	13.1 0.516	– –	0.7 0.028
MO 350-60-150/p6g	65410-024	6.0 0.236	35.0 1.378	14.4 0.567	15.0 0.591	33.5 1.319	4.4 0.173	31.5 1.240	0.8 0.031

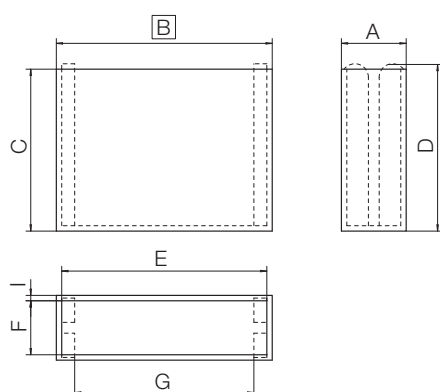

Stand 08/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland


NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com


Boxes, Specials

The boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125 °C) and gfr Polybutylene Terephthalate PBT of type pcg (RTI long-range temperature +130 °C).
Special materials and designs on request, dimensions in mm/*inch*.

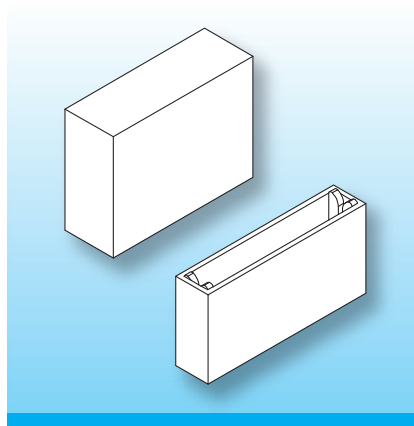

The potting boxes can be used to your individual requirements. In particular they are suitable for potting electrical components such as circuits on pcbs.

Type	Order-Code	A	B	C	D	E	F	G	I
MO 420-70-240/p6g	65405-024	7.0 0.276	42.0 1.654	23.4 0.921	24.0 0.945	40.6 1.598	5.2 0.205	38.4 1.512	0.8 0.031
Mgh. 39.1/15.0/15.2/p6g	93195-024	17.0 0.669	42.5 1.673	16.4 0.646	17.0 0.669	39.1 1.539	15.0 0.591	–	0.9 0.035
Mgh. 43.3/27.9/14.9/p6g	93160-024	30.1 1.185	45.5 1.791	16.2 0.638	–	43.3 1.705	27.9 1.098	–	1.0 0.039
Mgh. 47.0/8.2/19.0/p6g	93156-024	10.0 0.394	50.0 1.969	19.6 0.772	20.0 0.787	48.2 1.898	8.2 0.323	47.0 1.850	1.1 0.043
MO 532-70-230/p6g	65400-024	7.0 0.276	53.2 2.094	22.6 0.890	23.0 0.906	51.4 2.024	5.2 0.205	48.4 1.906	0.9 0.035
Mgh. 51.5/31.5/13.5/p6g	93157-024	33.5 1.319	53.5 2.106	14.5 0.571	15.0 0.591	51.5 2.028	31.5 1.240	–	1.0 0.039
DI-Geh. 19.0/9.0/6.0/pcg	93213-047	10.0 0.394	20.0 0.787	6.5 0.256	–	19.0 0.748	9.0 0.354	–	0.5 0.020
Becher 21.0/6.7/4.7/pcg	93178-047	9.3 0.366	22.0 0.866	5.5 0.217	–	21.0 0.827	8.3 0.327	–	0.5 0.020

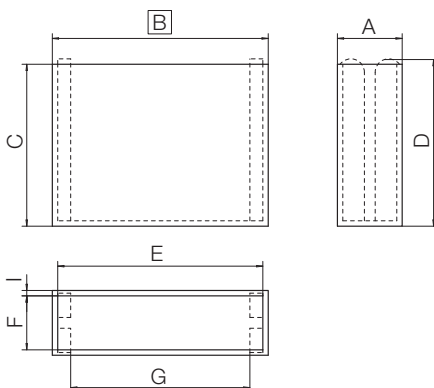

Stand 08/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com