


Vertical Potting Box (VB)

The potting boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125 °C) and CR-A3H2G6, black (RTI long-range temperature +110 °C). Pin material: tin bronze, tinned. Maximum solder temperature 350 °C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

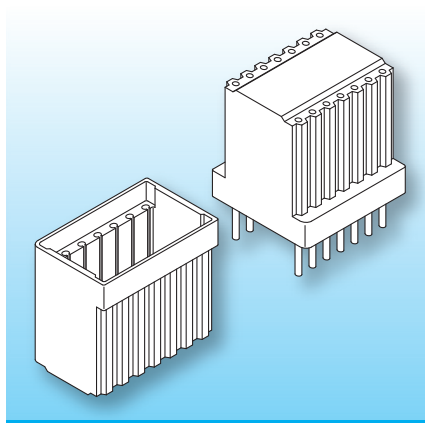

Potting boxes for PCB mounting of toroidal cores.

Depending on how the pins are fitted, the box can be pcb mounted potting side up or down.

If there are no specific instructions, side A will be supplied.

Type

Box: VB 20.0/12.5-23/-8/p6g
Solder-pin: r826/ua

Order-Code


66302-024
77326-212

Accessories

on request


wound toroidal core

diameter Ø 21.4/Ø 0.843
width 11.3/0.445

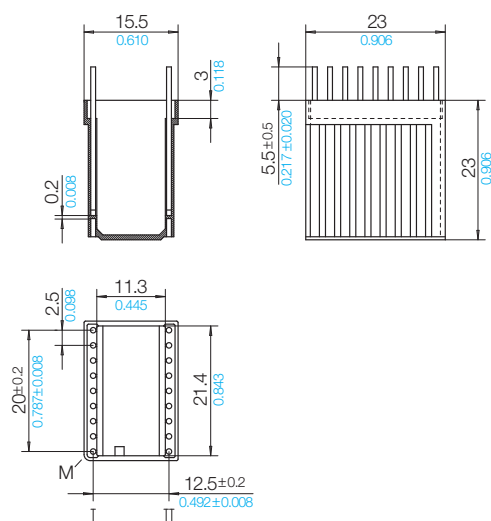

Grid

View open side of box



Stand 04/2014 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version