


Horizontal Potting Box (H-RG) for pcb mounting

The potting boxes are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130 °C). Pin material: tin bronze, tinned. Maximum solder temperature 350 °C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

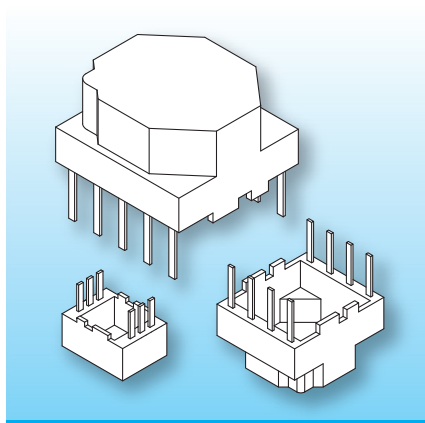

Boxes for pcbs, suitable for filter chokes or ISDN components. Depending on the box-type the solder pins have a cross-section of 0.6 x 0.25 mm ([0.023 x 0.010 inch](#)) and 0.6 x 0.4 mm ([0.023 x 0.016 inch](#)). The design features “stand offs” to the pcb to eliminate cold soldering, or can be used as positioning aid.

Type

Potting Box: H-RG 16.5/16.5/9.1/14f640-/torA504
Solder-pin: f640-70/ub

Order-Code


66375-132
75970-213

Accessories


on request

wound toroidal core

diameter Ø 16.5/[Ø 0.650](#)
width 7.6/[0.299](#)

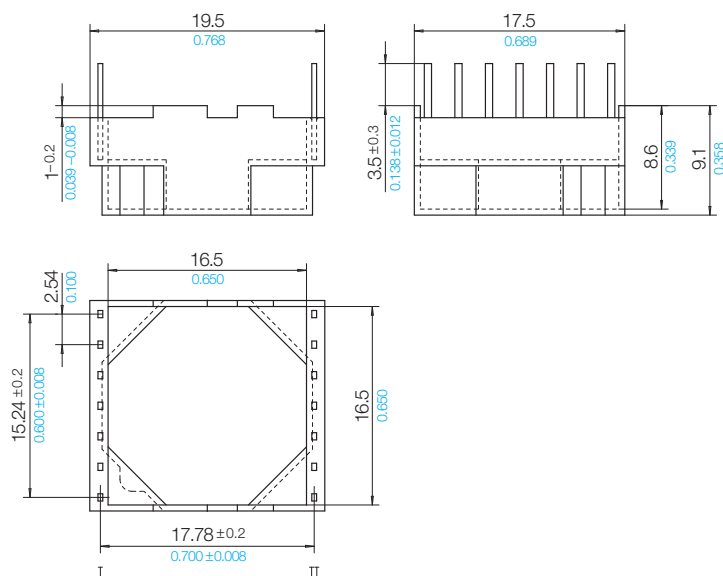

Grid View pin-side



Stand 03/2014 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version