


Potting Boxes, Specials

The boxes are made in gfr Poly-butylene Terephthalate PBT of type pcg (RTI long-range temperature +130 °C). Pin material: tin bronze, tinned. Maximum solder temperature 350 °C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

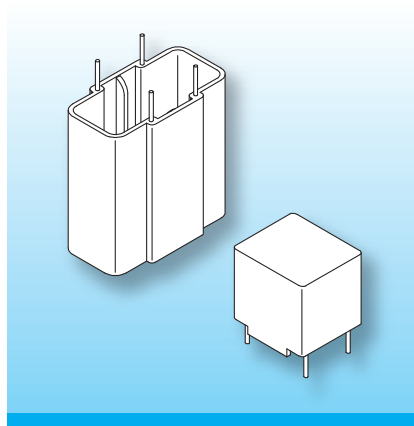


The potting boxes can be used to your individual requirements. In particular they are suitable for potting electrical components such as circuits on pcbs.

Type	Order-Code	Accessories
Potting-Box: Vgh. 16.0/16.0/17.0/pcg Solder-pin: z810/ua	93010-047 73296-212	on request


wound toroidal core

diameter Ø 16.0/Ø 0.630
width 12.5/0.492

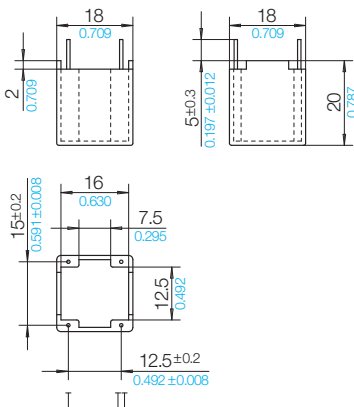

Grid

View pin-side



Stand 08/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com