


DIL-Sockets with Stand-offs

The sockets are made in gfr Poly-butylene Terephthalate PBT of type pcg (RTI long-range temperature 130 °C). Solder-tag material is brass tinned and solder-pin material is tin bronze, tinned.

Maximum solder temperature 350 °C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*.

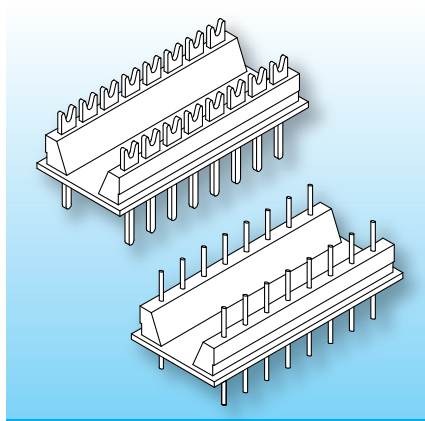

DIL-Sockets (Dual-In-Line) are suitable for complex circuits such as logic circuits, resistor networks or diode matrix. The sockets feature “stand-offs” which allow clean soldering of the wires and of the sockets onto the pcb. A suitable DIL-Box is available.

Type


Socket: U 14/s-/pcg
Solder-tag: s5/wd

Order-Code

N0348-047 [on request](#)
N0350-261 [on request](#)


Accessories

DIL-Box D14-7
DIL-Box D14-10

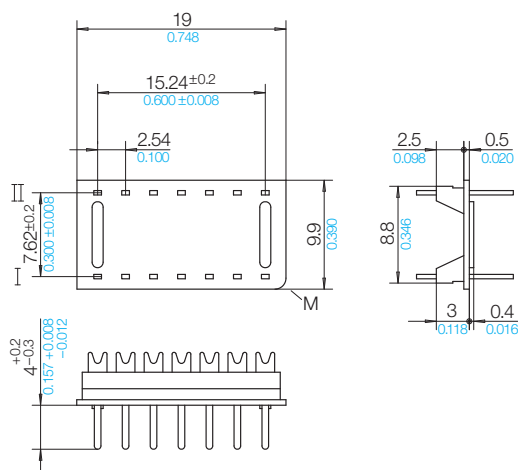

Grid

View tag-side



Stand 06/2016 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version