


## Horizontal Potting Box (H-RG) for pcb mounting

The potting boxes are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130 °C). Pin material: tin bronze, tinned. Maximum solder temperature 350 °C, 2 sec. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/[inch](#).

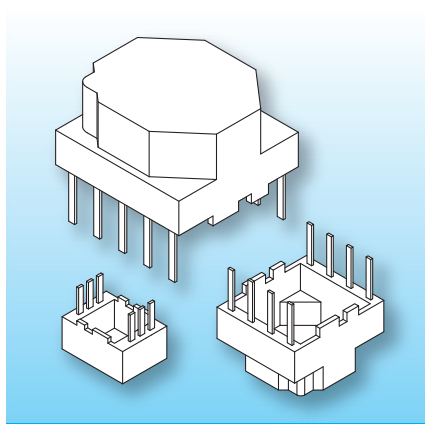

Boxes for pcbs, suitable for filter chokes or ISDN components. Depending on the box-type the solder pins have a cross-section of 0.6 x 0.25 mm ([0.023 x 0.010 inch](#)) and 0.6 x 0.4 mm ([0.023 x 0.016 inch](#)). The design features “stand offs” to the pcb to eliminate cold soldering, or can be used as positioning aid.

### Type

Potting Box: H-RG 11.5/11.5/7.1/10f625-/torA504  
Solder-pin: f625-70/ub

### Order-Code


N0351-132 [on request](#)  
75870-213

### Accessories


on request

### wound toroidal core

diameter Ø 11.5/Ø [0.453](#)  
width 5.6/[0.220](#)

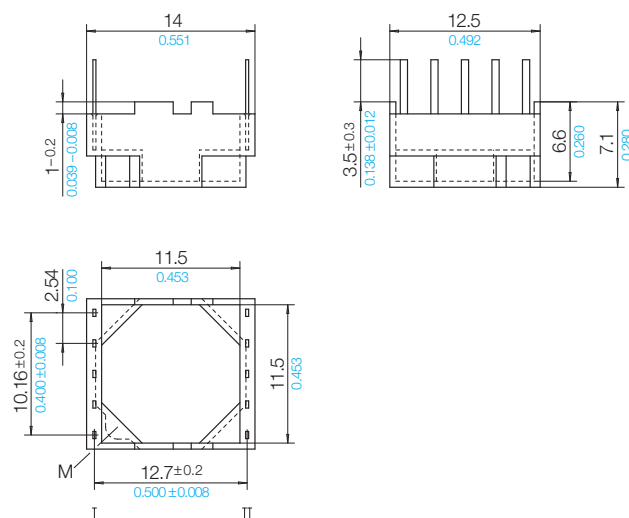

### Grid View pin-side



Stand 03/2014 | © 2026 NORWE ONE GmbH

Warranties:  
refer to Terms and Conditions of Sale

### NORWE ONE GmbH

Postfach 13 56  
51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland

Telefon +49 (0) 27 63-807-0  
WhatsApp +49 2763 807-0  
E-mail [verkauf@norwe.de](mailto:verkauf@norwe.de)  
Internet [www.norwe.de](http://www.norwe.de)  
[www.norwe.eu](http://www.norwe.eu)

### NORWE Inc.

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America

Telefon +1-330 497-8113  
E-mail [usa@norwe.com](mailto:usa@norwe.com)  
Internet [www.norwe.com](http://www.norwe.com)



Valid version of  
data sheet online

QR Online-Version