


Classical Notched Press-Fit Solder-Pins (p)


with stamped notches, are made from drawn wire. The cut cross-sections are bare. This type of pin is preferred when pinning small quantities of components manually. Because of the notches this pin has limited use when pinning brittle plastic components.

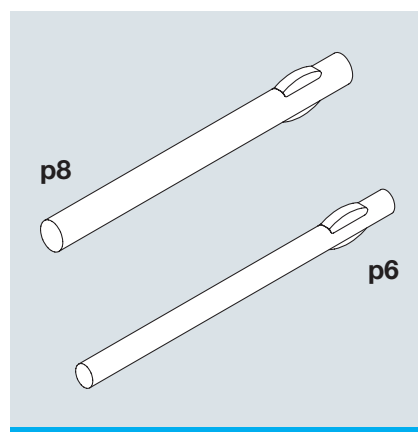

The material of the pins is tin bronze CuSn 6, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code	G	B	C
p6	p606/ua	70247-212	6.0 / 0.236	5.0 / 0.197	1.0 / 0.039
	p607/ua	70248-212	7.0 / 0.276	6.0 / 0.236	1.0 / 0.039
	p608/ua	70249-212	8.0 / 0.315	7.0 / 0.276	1.0 / 0.039
	p609/ua	70250-212	9.0 / 0.354	8.0 / 0.315	1.0 / 0.039
	p610/ua	70252-212	10.0 / 0.394	9.0 / 0.354	1.0 / 0.039
	p611/ua	70253-212	11.0 / 0.433	10.0 / 0.394	1.0 / 0.039
	p612/ua	70251-212	12.0 / 0.472	11.0 / 0.433	1.0 / 0.039
p8	p807/ua	70100-212	7.0 / 0.276	6.0 / 0.236	1.0 / 0.039
	p808/ua	70103-212	8.0 / 0.315	7.0 / 0.276	1.0 / 0.039
	p809/ua	70116-212	9.0 / 0.354	8.0 / 0.315	1.0 / 0.039
	p810/ua	70104-212	10.0 / 0.394	9.0 / 0.354	1.0 / 0.039
	p811/ua	70303-212	11.0 / 0.433	10.0 / 0.394	1.0 / 0.039
	p812/ua	70105-212	12.0 / 0.472	11.0 / 0.433	1.0 / 0.039
	p813/ua	70313-212	13.0 / 0.512	12.0 / 0.472	1.0 / 0.039
	p814/ua	70300-212	14.0 / 0.551	13.0 / 0.512	1.0 / 0.039
	p815/ua	70117-212	15.0 / 0.591	14.0 / 0.551	1.0 / 0.039

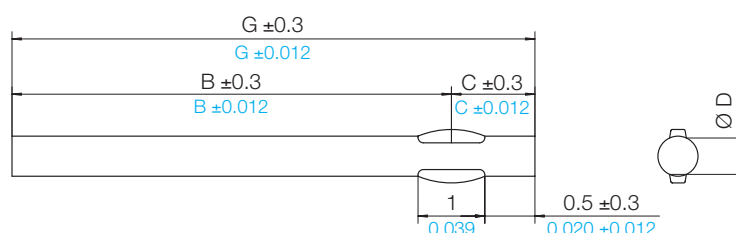

shape	Ø D
p6	0.60 / 0.024
p8	0.80 / 0.031
p1	1.00 / 0.039
p2	1.20 / 0.047