


Flat Press-Fit Solder-pins (f)



are made and cut from drawn wire. The cut cross-sections are bare. This pin is preferred when pinning in small quantities of components, in particular SMD-Series and potting-boxes.

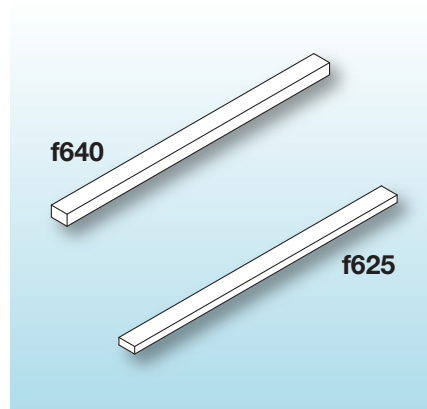

The material of the pins is tin bronze CuSn8, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code		G	Shape	Type	Order-Code		G
f625	f625-30	75850-213	on request	3.0 / 0.118	f640	f640-30	75951-213	on request	3.0 / 0.118
	f625-40	75854-213	on request	4.0 / 0.157		f640-40	75955-213	on request	4.0 / 0.157
	f625-50	75859-213	on request	5.0 / 0.197		f640-50	75958-213	on request	5.0 / 0.197
	f625-60	75865-213	on request	6.0 / 0.236		f640-60	75963-213	on request	6.0 / 0.236
	f625-70	75870-213	on request	7.0 / 0.276		f640-70	75970-213	on request	7.0 / 0.276
	f625-80	75875-213	on request	8.0 / 0.315					
	f625-100	76078-213	on request	10.0 / 0.394					



shape	X	Y
f625	0.60 / 0.024	0.25 / 0.010
f640	0.60 / 0.024	0.40 / 0.016

Stand 08/2022 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale



Valid version of
data sheet online

QR Online-Version

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com